



One Cell Lithium-ion/Polymer Battery Protection IC

CJBM1A330E BMS-Protector

1 Introduction

The CJBM1A330E product is a high integration solution for lithium-ion/polymer battery protection. It contains advanced power MOSFET, high-accuracy voltage detection and delay circuits. With only one external component needed, it's an ideal solution for battery pack with limited space.

CJBM1A330E has all the protection functions required in the battery applications, including overcharging, overdischarging, overcurrent and load short circuit protection etc. Its accurate overcharging detection voltage ensures safe and full utilization of battery's charging capability.

Additionally, the device's low standby current feature minimizes battery drain during storage. It is designed not only for digital cellular phones but also for any Li-Ion and Li-Poly battery-powered information appliances that require long-term battery life.

2 Available Packages

PART NUMBER	PACKAGE
CJBM1A330E	SOT-23-5L


Note: For all available packages, please refer to the part Orderable Information.

3 Features

- Protection of Charger Reverse Connection
- Protection of Battery Cell Reverse Connection
- Integrate Advanced Power MOSFET with Equivalent of $62\text{m}\Omega R_{\text{SS(ON)}}$
- Only One External Capacitor Required
- Over-temperature Protection
- Overcharge Current Protection
- Two-step Overcurrent Detection
 - Overdischarge Current Protection
 - Load Short Circuiting Protection
- Charger Detection Function
- 0V Battery Charging Function
- Delay Times are generated inside
- High-accuracy Voltage Detection
- Low Current Consumption
 - Operation Mode: $3.0\mu\text{A typ}$
 - Power-down Mode: $1.5\mu\text{A typ}$
- RoHS Compliant and Lead (Pb) Free

4 Applications

- One-Cell Lithium-ion Battery Pack
- Lithium-Polymer Battery Pack
- Wearable Device
- Bluetooth Earphone

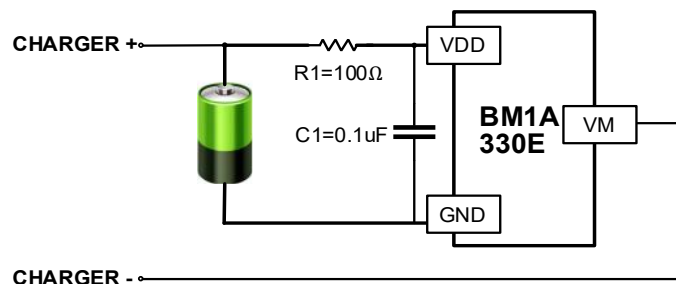

Simplified Block Diagram

5 Orderable Information

DEVICE	PACKAGE	OP TEMP	ECO PLAN	MSL	PACKING OPTION	SORT
CJBM1A330E-M5N	SOT-23-5L	-40~85°C	RoHS & Green	Level 3 168HR	Tape and Reel 3000 Units / Reel	Active

Note:

ECO PLAN: For the RoHS and Green certification standards of this product, please refer to the official report provided by JSCJ.

MSL: Moisture Sensitivity Level. Determined according to JEDEC industry standard classification.

SORT: Specifically defined as follows:

Active: Recommended for new products;

Customized: Products manufactured to meet the specific needs of customers;

Preview: The device has been released and has not been fully mass produced. The sample may or may not be available;

NoRD: It is not recommended to use the device for new design. The device is only produced for the needs of existing customers;

Obsolete: The device has been discontinued.

6 Pin Configuration and Marking Information

6.1 Pin Configuration

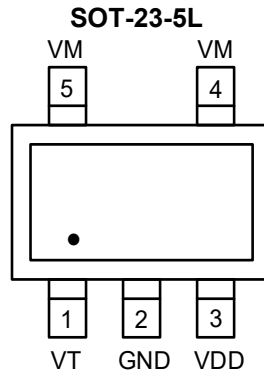



Figure 6-1 Pin Configuration

6.2 Pin Function

PIN		I/O ⁽¹⁾	DESCRIPTION
No.	NAME		
1	VT	I	Test pin, only for vendor, not used by application.
2	GND	G	Ground, connect the negative terminal of the battery to these pins.
3	VDD	P	Power Supply.
4,5	VM	O	The negative terminal of the battery pack. The internal FET switch connects this terminal to GND.

(1) I-Input, O-Output, P-Power, G-Ground

6.3 Marking Information



A330E: Device number.

XXXX: Code, indicates weekly record information.

DEVICE	PACKAGE	OV [VCU] (V)	OVR [VCL] (V)	UV [VDL] (V)	UVR [VDU] (V)	IOCD [IOV1] (A)	IOCC [ICHOC] (A)	Ishort [ISHORT] (A)	TOP MARK
CJBM1A330E-M5N	SOT-23-5L	4.30	4.10	2.40	3.0	3.3	3.3	20	A330E

7 Specifications

7.1 Absolute Maximum Ratings

Voltages are referenced to GND (ground=0V), unless otherwise specified.

SYMBOL	PARAMETER	MIN.	MAX.	UNIT
V _{DD}	VDD input pin voltage	-0.3	6	V
V _M	VM input pin voltage	-6	10	V
T _A	Operating Ambient Temperature	-40	85	°C
T _{J_MAX}	Maximum Junction Temperature	-	150	°C
T _{stg}	Storage Temperature	-55	150	°C
T _{solder}	Lead Temperature (Soldering, 10 sec)	-	300	°C
P _{D_MAX}	Power Dissipation at T=25°C	-	0.4	W

Note: Absolute maximum ratings indicate sustained limits beyond which damage to the device may occur. All voltage parameters are absolute voltages referenced to GND. The thermal resistance and power dissipation ratings are measured under board mounted and still air conditions.

7.2 ESD Ratings

SYMBOL	ESD RATINGS		VALUE	UNIT
V _{ESD-HBM}	Electrostatic discharge	Human body model (HBM) ⁽¹⁾	±2000	V

(1) JEDEC document JEP155 states that 500-V H1BM allows safe manufacturing with a standard ESD control process.

7.3 Thermal Information

SYMBOL	THERMAL METRIC	SOT-23-5L	UNIT
R _{θJA}	Junction-to-ambient thermal resistance	250	°C/W
R _{θJC}	Junction-to-Case thermal resistance	130	°C/W

7.4 Electrical Characteristics

Typical and limits appearing in normal type apply for $T_A = 25^\circ\text{C}$, unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
Detection Voltage						
V_{CU}	Overcharge Detection Voltage	-	4.25	4.30	4.35	V
V_{CL}	Overcharge Release Voltage	-	4.05	4.10	4.15	V
V_{DL}	Overdischarge Detection Voltage	-	2.3	2.4	2.5	V
V_{DU}	Overdischarge Release Voltage	-	2.9	3.0	3.1	V
Detection Current						
$I_{IOV1(1)}$	Overdischarge Current1 Detection	$V_{DD}=3.6\text{V}$	2.5	3.3	4.1	A
$I_{CHOC(1)}$	Overcharge Current Detection	$V_{DD}=3.6\text{V}$	2.5	3.3	4.1	A
$I_{SHORT(1)}$	Load Short-Circuiting Detection ⁽¹⁾	$V_{DD}=3.6\text{V}$	10	20	30	A
Current Consumption						
I_{OPE}	Current Consumption in Normal Operation	$V_{DD}=3.6\text{V}; V_M=0\text{V}$	-	3	6	μA
I_{PDN}	Current Consumption in power Down	$V_{DD}=2.0\text{V}; V_M$ pin floating	-	1.5	3	μA
VM Internal Resistance						
$R_{VMD(1)}$	Internal Resistance between VM and V_{DD}	$V_{DD}=2.0\text{V}; V_M$ pin floating	200	300	400	$\text{k}\Omega$
$R_{VMS(1)}$	Internal Resistance between VM and GND	$V_{DD}=3.6\text{V}; V_M=1.0\text{V}$	10	20	30	$\text{k}\Omega$
FET on Resistance						
$R_{SS(ON)(1)}$	Equivalent FET on Resistance ⁽¹⁾	$V_{DD}=3.6\text{V}; I_{VM}=1.0\text{A}$	50	62	74	$\text{m}\Omega$
Over Temperature Protection						
$T_{SHD+}(1)$	Over Temperature Protection	-	-	150	-	$^\circ\text{C}$
$T_{SHD-}(1)$	Over Temperature Recovery Degree	-	-	110	-	$^\circ\text{C}$
Detection Delay Time						
t_{CU}	Overcharge Voltage Detection Delay Time	-	80	130	180	ms
t_{DL}	Overdischarge Voltage Detection Delay Time	-	20	40	60	ms
$t_{IOV1(1)}$	Overdischarge Current Detection Delay Time	$V_{DD}=3.6\text{V}$	4	8	16	ms
$t_{CHOC(1)}$	Overcharge Current Detection Delay Time	$V_{DD}=3.6\text{V}$	4	8	16	ms
$t_{SHORT(1)}$	Load Short-Circuiting Detection Delay Time	$V_{DD}=3.6\text{V}$	80	160	300	μs

(1) The parameter is guaranteed by design

8 Detailed Description

8.1 Overview

The CJBM1A330E monitors the voltage and current of a battery and protects it from being damaged due to overcharge voltage, overdischarge voltage, overdischarge current, and short circuit conditions by disconnecting the battery from the load or charger. These functions are required to operate the battery cell within specified limits. The device requires only one external capacitor. The R_{dson} of integrated MOSFET is as low as 62mΩ typical.

8.2 Functional Block Diagram

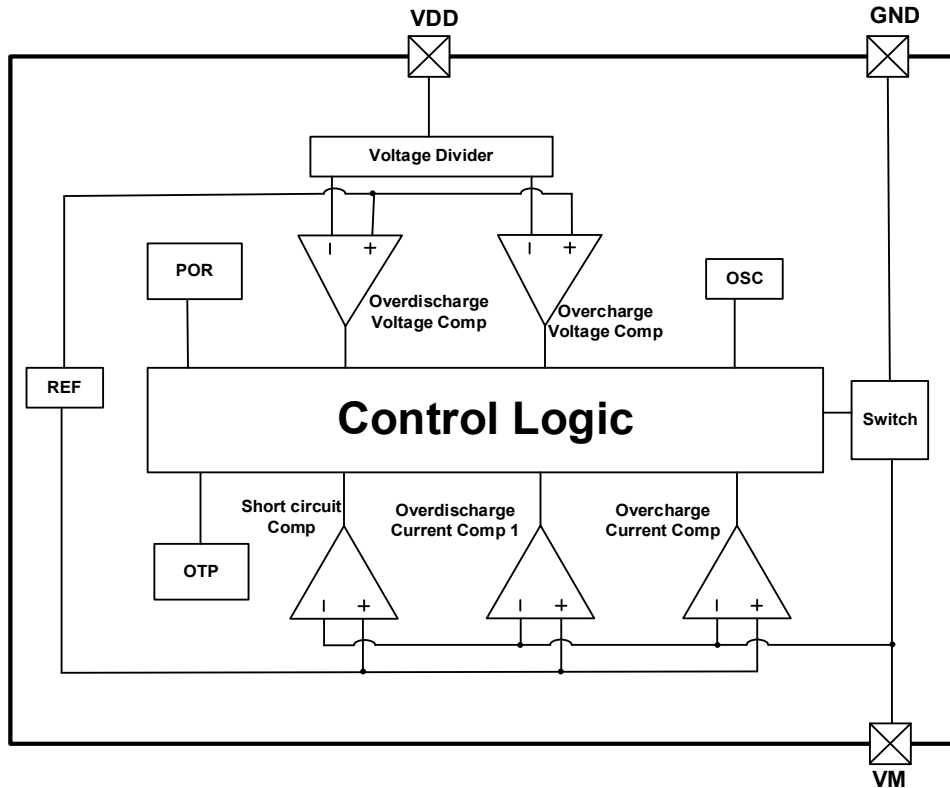


Figure 8-1 Logic Diagram

8.3 Feature Description

8.3.1 Normal Operation Mode

If no exception condition is detected, charging and discharging can be carried out freely. This condition is called the normal operating mode.

8.3.2 Overcharge Condition

When the battery voltage becomes higher than the overcharge detection voltage (V_{CU}) during charging under normal condition and the state continues for the overcharge detection delay time (t_{CU}) or longer, the CJBM1A330E turns the charging control FET off to stop charging. This condition is called the overcharge condition. The overcharge condition is released in the following two cases:

- 1) When the battery voltage drops below the overcharge release voltage (V_{CL}), the CJBM1A330E turns the charging control FET on and returns to the normal condition.
- 2) When a load is connected and discharging starts, the CJBM1A330E turns the charging control FET on and returns to normal condition. The release mechanism is as follows: the discharging current flows through an internal parasitic diode of the charging FET immediately after a load is connected and discharging starts, and the VM pin voltage

increases (due to forward voltage of the diode) from the GND pin voltage momentarily. The CJBM1A330E detects this voltage and releases the overcharge condition. Consequently, in the case that the battery voltage is equal to or lower than the overcharge detection voltage (V_{CU}), the CJBM1A330E returns to the normal condition immediately, but in the case the battery voltage is higher than the overcharge detection voltage (V_{CU}), the chip does not return to the normal condition until the battery voltage drops below the overcharge detection voltage (V_{CU}) even if the load is connected. In addition, if the VM pin voltage is equal to or lower than the overcurrent detection voltage when a load is connected and discharging starts, the chip does not return to normal condition.

Remark: If the battery is charged to a voltage higher than the overcharge detection voltage (V_{CU}) and the battery voltage does not drop below the overcharge detection voltage (V_{CU}) even when a heavy load, which causes an overcurrent, is connected, the overcurrent does not work until the battery voltage drops below the overcharge detection voltage (V_{CU}). Since an actual battery has, however, an internal impedance of several dozens of $m\Omega$, and the battery voltage drops immediately after a heavy load which causes an overcurrent is connected, the overcurrent work. Detection of load short-circuiting works regardless of the battery voltage.

8.3.3 Overdischarge Condition

When the battery voltage drops below the overdischarge detection voltage (V_{DL}) during discharging under normal condition and it continues for the overdischarge detection delay time (t_{DL}) or longer, the CJBM1A330E turns the discharging control FET off and stops discharging. This condition is called overdischarge condition. After the discharging control FET is turned off, the VM pin is pulled up by the R_{VMD} resistor between VM and VDD in CJBM1A330E. Meanwhile when VM is higher than 1.5V (typ.), the current of the chip is reduced to the power-down current (I_{PDN}). This condition is called power-down condition. The VM and VDD pins are shorted by the R_{VMD} resistor in the IC under the overdischarge and power-down conditions.

The power-down condition is released when a charger is connected and the potential difference between VM and VDD becomes 1.3 V (typ.) or lower. At this time, the FET is still off. When the battery voltage becomes the overdischarge detection voltage (V_{DL}) or higher and the VM pin voltage is lower than the charger detection voltage (V_{CHA}), the CJBM1A330E turns the FET on and changes to the normal condition from the overdischarge condition.

Remark: If the VM pin voltage is no less than the charger detection voltage (V_{CHA}), when the battery under overdischarge condition is connected to a charger, the overdischarge condition is released (the discharging control FET is turned on) as usual, provided that the battery voltage reaches the overdischarge release voltage (V_{DU}) or higher.

8.3.4 Overcurrent Condition

When the discharging current becomes equal to or higher than a specified value (the VM pin voltage is equal to or higher than the overcurrent detection voltage) during discharging under normal condition and the state continues for the overcurrent detection delay time or longer, the CJBM1A330E turns off the discharging control FET to stop discharging. This condition is called overcurrent condition. (The overcurrent includes overcurrent, or load short-circuiting.)

The VM and GND pins are shorted internally by the R_{VMS} resistor under the overcurrent condition. When a load is connected, the VM pin voltage equals the VDD voltage due to the load.

The overcurrent condition returns to the normal condition when the load is released and the impedance between the B+ and B-pins becomes higher than the automatic recoverable impedance. When the load is removed, the VM pin goes back to the GND potential since the VM pin is shorted the GND pin with the R_{VMS} resistor. Detecting that the VM pin potential is lower than the load removed detection voltage, the IC returns to normal condition.

8.3.5 Abnormal Charge Current Detection

If the VM pin voltage drops below the charge overcurrent detection threshold (I_{CHOC}) during charging under the normal condition and it continues for the overcharge detection delay time (t_{CHOC}) or longer, the CJBM1A330E turns the charging control FET off and stops charging. This action is called abnormal charge current detection.

Abnormal charge current detection works when the discharging control FET is on and the VM pin voltage drops below the detection voltage. When an abnormal charge current flows into a battery in the overdischarge condition, the CJBM1A330E consequently turns the charging control FET off and stops charging after the battery voltage becomes the overdischarge detection voltage and the overcharge detection delay time (t_{CU}) elapses.

Abnormal charge current detection is released when the voltage difference between VM pin and GND pin becomes lower than the charger detection voltage (V_{CHA}) by separating the charger. Since the 0 V battery charging function has higher priority than the abnormal charge current detection function, abnormal charge current may not be detected by the product with the 0 V battery charging function while the battery voltage is low.

8.3.6 Load Short-Circuiting Condition

If discharge current is higher than short circuit protection current (I_{SHORT}), the CJBM1A330E will stop discharging and battery is disconnected from load. The maximum delay time to switch current off is t_{SHORT} . This status is released when voltage of VM pin is lower than the load removed detection voltage, such as when disconnecting the load

8.3.7 Delay Circuits

The detection delay time for load short-circuiting starts when overdischarge current 1 is detected. As soon as load short-circuiting is detected over detection delay time for load short-circuiting, the CJBM1A330E stops discharging. When battery voltage falls below overdischarge detection voltage due to overdischarge current, the CJBM1A330E stops discharging by overdischarge current detection. In this case the recovery of battery voltage is so slow that if battery voltage after overdischarge voltage detection delay time is still lower than overdischarge detection voltage, the CJBM1A330E shifts to power-down.

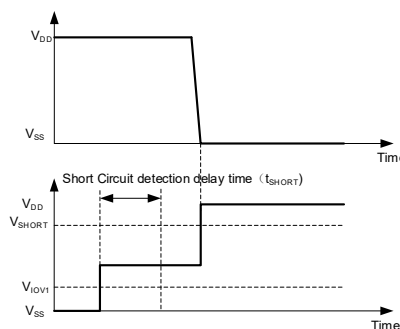


Figure 8-2 Overcurrent Delay Time

8.3.8 0V Battery Charging Function

This function enables the charging of a connected battery whose voltage is 0V by self-discharge. When a charger having 0V battery start charging charger voltage (V_{0CHA}) or higher is connected between B+ and B- pins, the charging control FET gate is fixed to VDD potential. When the voltage between the gate and the source of the charging control FET becomes equal to or higher than the turn-on voltage by the charger voltage, the charging control FET is turned on to start charging. At this time, the discharging control FET is off and the charging current flows through the internal parasitic diode in the discharging control FET. If the battery voltage becomes equal to or higher than the overdischarge release voltage (V_{DU}), the normal condition returns.

Note:

- (1) Some battery providers do not recommend charging of completely discharged batteries. Please refer to battery providers before the selection of 0 V battery charging function.
- (2) The 0V battery charging function has higher priority than the abnormal charge current detection function. Consequently, a product with the 0 V battery charging function charges a battery and abnormal charge current cannot be detected during the battery voltage is low (at most 1.8 V or lower).
- (3) When a battery is connected to the IC for the first time, the IC may not enter the normal condition in which discharging is possible. In this case, set the VM pin voltage equal to the GND voltage (short the VM and GND pins or connect a charger) to enter the normal condition.

8.4 Time Chart

8.4.1 Overcharge and Overdischarge Detection

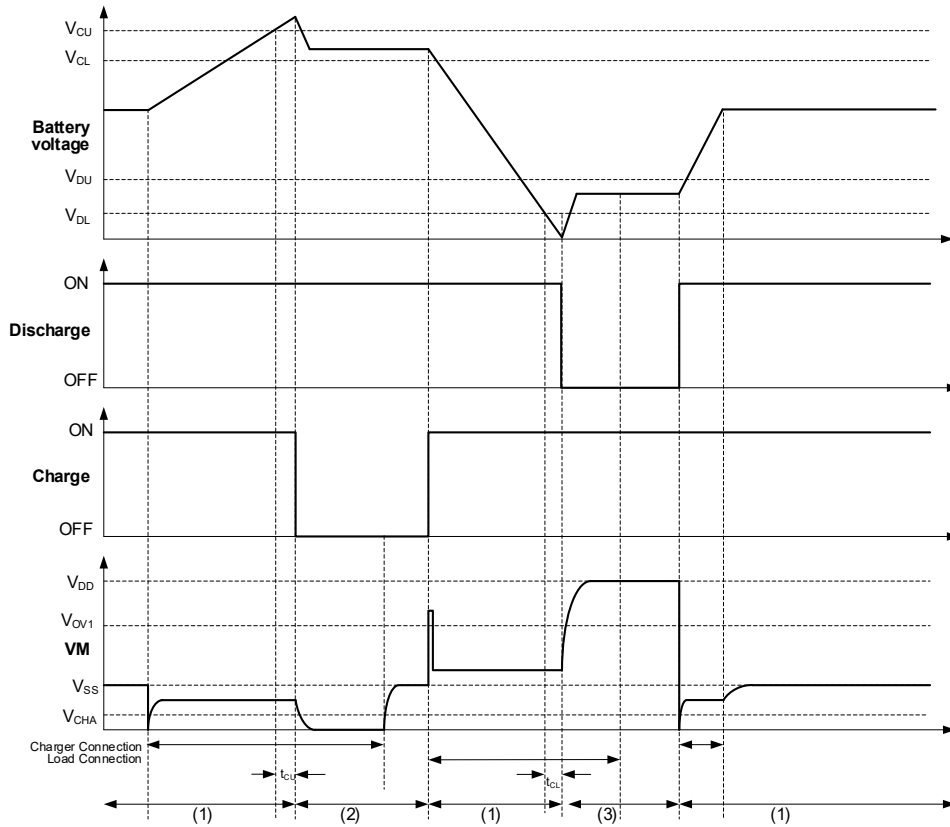


Figure 8-3 Overcharge and Overdischarge Voltage Detection

Remark: (1) Normal condition (2) Overcharge voltage condition (3) Overdischarge voltage condition (4) Overcurrent condition

8.4.2 Overdischarge Current Detection

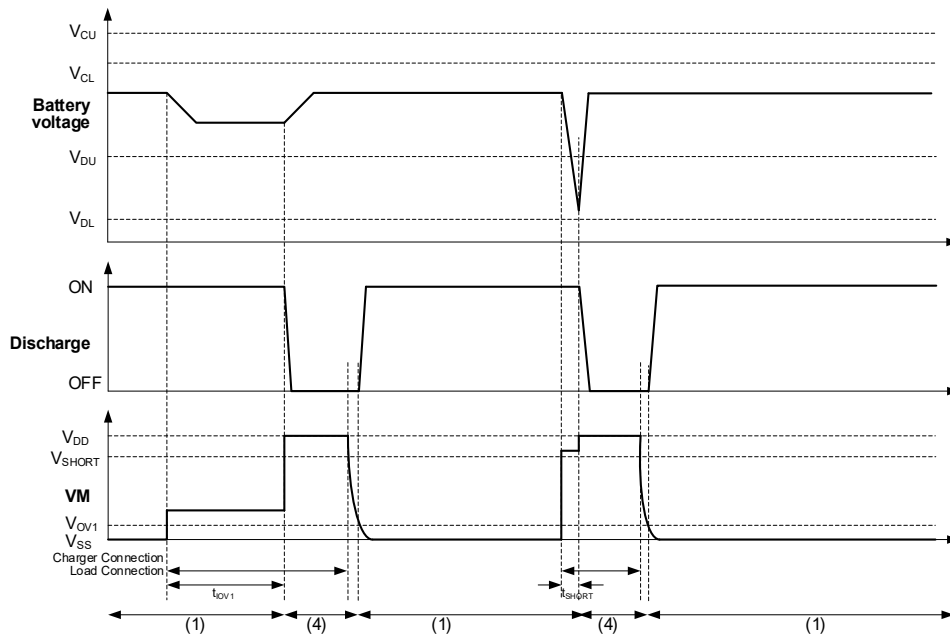


Figure 8-4 Overdischarge Current Detection

Remark: (1) Normal condition (2) Overcharge voltage condition (3) Overdischarge voltage condition (4) Overcurrent condition

8.4.3 Charger Detection

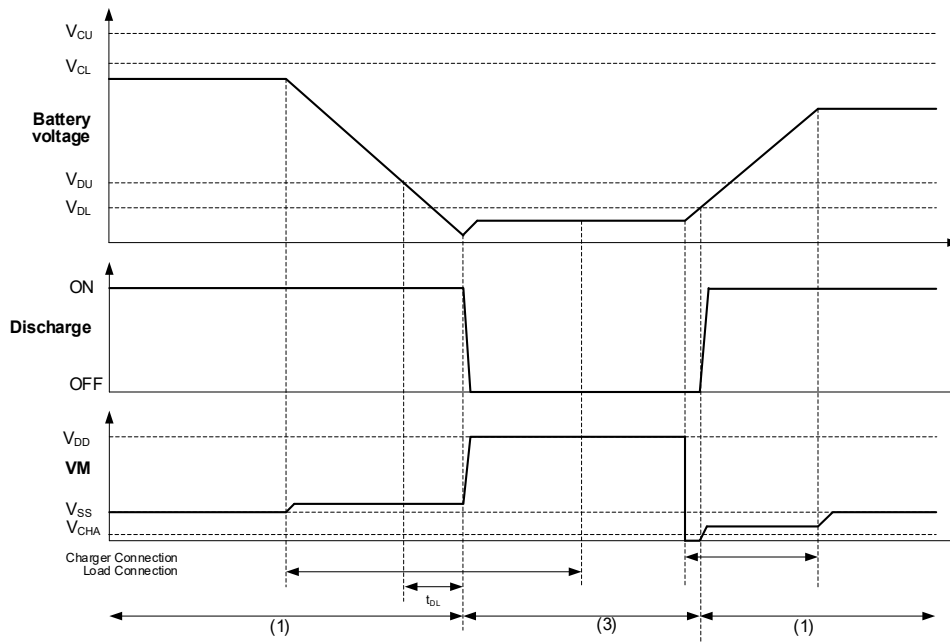


Figure 8-5 Charger Detection

Remark: (1) Normal condition (2) Overcharge voltage condition (3) Overdischarge voltage condition (4) Overcurrent condition

8.4.4 Abnormal Charger Detection

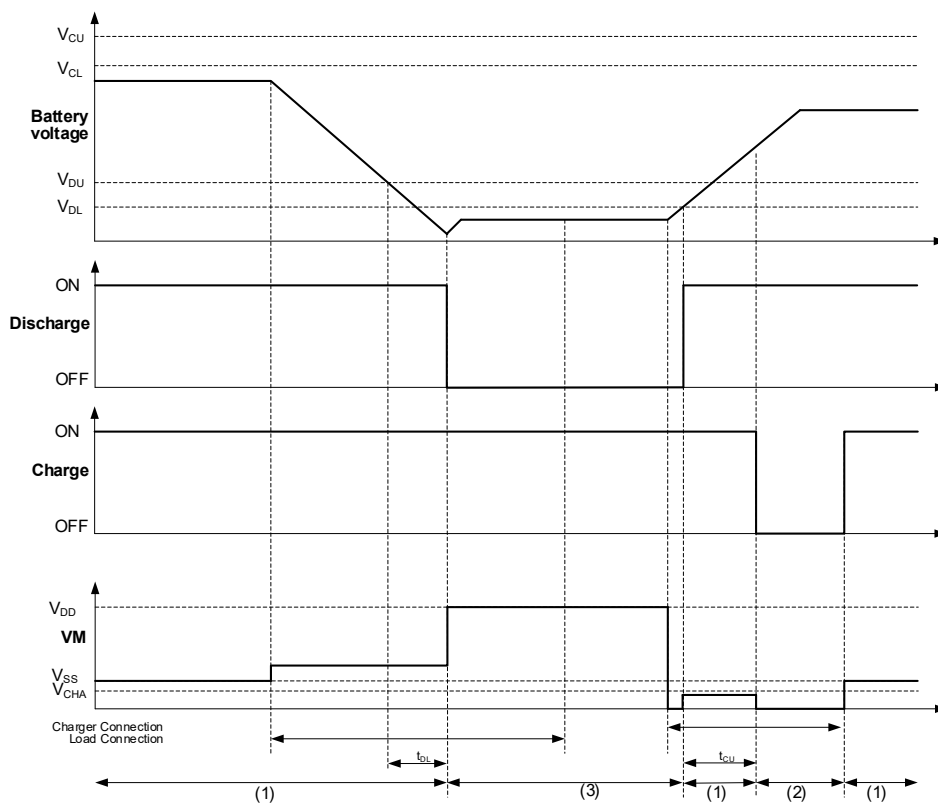


Figure 8-6 Abnormal Charger Detection

Remark: (1) Normal condition (2) Overcharge current condition (3) Overdischarge voltage condition (4) Overcurrent condition

9 Typical Application and Layout Guideline

To optimize performance, refer to the application example and guidelines below:

- The bold line is the high current path which must be kept as short as possible.
- C1 is a decoupling capacitor which should be placed as close as possible to CJBM1A330E
- For thermal management, ensure that these trace widths are adequate.


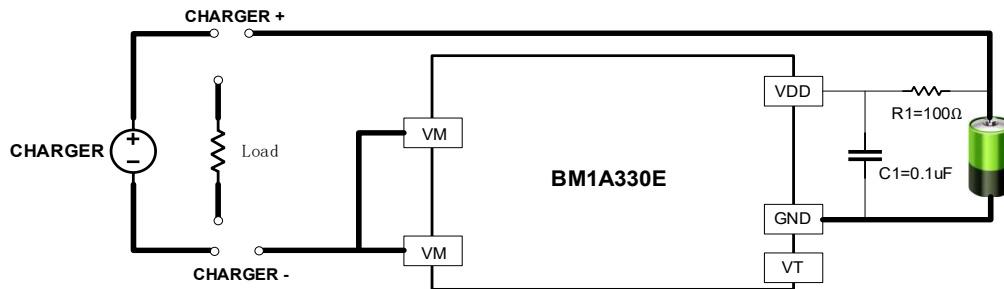


Figure 9-1 CJBM1A330E in a Typical Battery Protection Circuit

10 Mechanical Information

10.1 SOT-23-5L Mechanical Information

10.1.1 SOT-23-5L Outline Dimensions

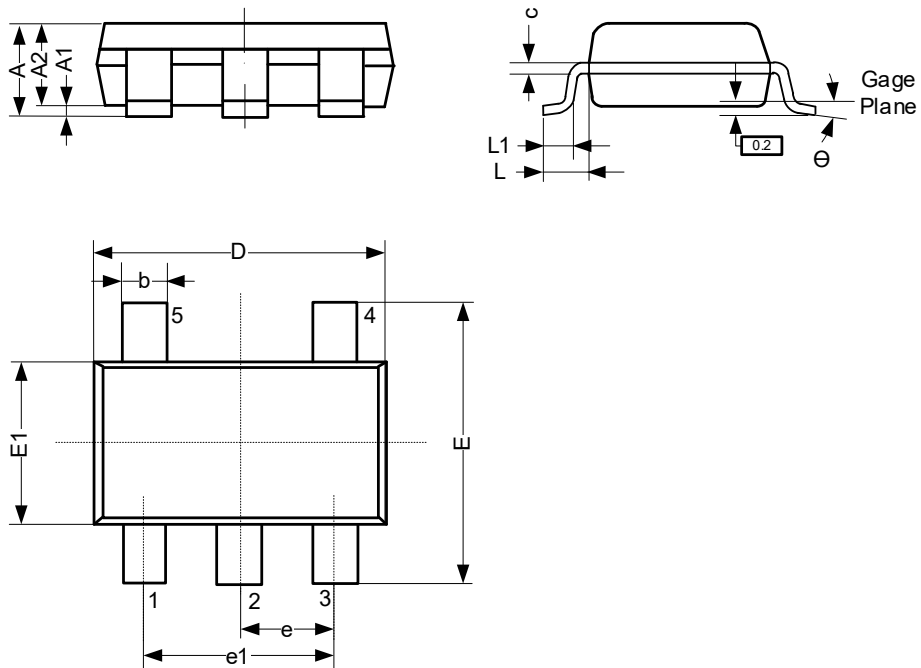

SYMBOL	Dimensions In Millimeters		
	Min.	Typ.	Max.
A	0.95	-	1.25
A1	0.00	-	0.10
A2	0.90	-	1.15
b	0.30	-	0.40
c	0.10	-	0.20
D	2.82	-	3.02
E	2.65	-	2.95
E1	1.50	-	1.70
e	0.95 BSC		
e1	1.80	-	2.00
L	0.70 REF		
L1	0.30	-	0.60
θ	0°	-	8°
Unit: mm			

11 Notes and Revision History

11.1 Associated Product Family and Others

To view other products of the same type or IC products of other types, click the official website of JSCJ -- <https://www.jscj-elec.com> for more details.

11.2 Notes

Electrostatic Discharge Caution



This IC may be damaged by ESD. Relevant personnel shall comply with correct installation and use specifications to avoid ESD damage to the IC. If appropriate measures are not taken to prevent ESD damage, the hazards caused by ESD include but are not limited to degradation of integrated circuit performance or complete damage of integrated circuit. For some precision integrated circuits, a very small parameter change may cause the whole device to be inconsistent with its published specifications.

11.3 Revision History

May, 2025: rev - 1.3, Change datasheet format and correct figures in 8.4.

July, 2025: rev - 1.4, Change device name.

DISCLAIMER

IMPORTANT NOTICE, PLEASE READ CAREFULLY

The information in this data sheet is intended to describe the operation and characteristics of our products. JSCJ has the right to make any modification, enhancement, improvement, correction or other changes to any content in this data sheet, including but not limited to specification parameters, circuit design and application information, without prior notice.

Any person who purchases or uses JSCJ products for design shall: 1. Select products suitable for circuit application and design; 2. Design, verify and test the rationality of circuit design; 3. Procedures to ensure that the design complies with relevant laws and regulations and the requirements of such laws and regulations. JSCJ makes no warranty or representation as to the accuracy or completeness of the information contained in this data sheet and assumes no responsibility for the application or use of any of the products described in this data sheet.

Without the written consent of JSCJ, this product shall not be used in occasions requiring high quality or high reliability, including but not limited to the following occasions: medical equipment, military facilities and aerospace. JSCJ shall not be responsible for casualties or property losses caused by abnormal use or application of this product.

Official Website: www.jscj-elec.com

Copyright © JIANGSU CHANGJING ELECTRONICS TECHNOLOGY CO., LTD