


PDFNWB5×6-8L Plastic-Encapsulate MOSFET

CJAC40SN10H N-Channel Power MOSFET

Key Performance Parameters

V_{BR(DSS)}	R_{DS(on)}TYP	I_D
100V	14mΩ@10V	40A

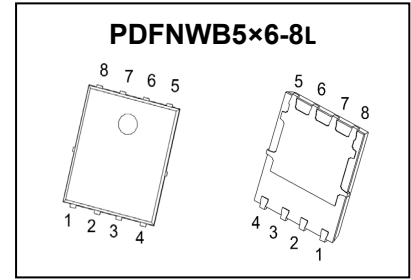

DESCRIPTION

The N-Channel enhancement mode power field effect transistors is using SGT technology. This advanced technology has been especially tailored to minimize on-state resistance, provide superior switching performance.


FEATURES

- Battery switch
- Load switch
- High density cell design for ultra low R_{DS(on)}

APPLICATIONS


- SMPS and general purpose applications
- Hard switched and high frequency circuits
- Uninterruptible Power Supply

MARKING



CJACXXXXX = Part No.
 XXXXX = 40SN10H
 Solid dot = Pin1 indicator.
 YY = Code.

EQUIVALENT CIRCUIT



ABSOLUTE MAXIMUM RATINGS (T_J=25°C unless otherwise specified)

Parameter	Symbol	Value	Unit
Drain-Source Voltage	V _{DS}	100	V
Gate-Source Voltage	V _{GS}	±20	V
Continuous Drain Current	I _D	T _C = 25°C	40
		T _C = 100°C	25
Pulsed Drain Current	I _{DM} ^{①②}	160	A
Continuous Drain Current	I _D	T _A = 25°C	7.2
		T _A = 75°C	5.5
Avalanche Current	I _{AS} ^③	15	A
Single Pulsed Avalanche Energy	E _{AS} ^③	56	mJ
Power Dissipation	P _D ^④	69	W
Operating Junction and Storage Temperature Range	T _J , T _{stg}	-55~+150	°C

Thermal Characteristics

Parameter	Symbol	Value		Unit
		Typ	Max	
Thermal Resistance from Junction to Case	R _{θJC}	1.2	1.8	°C/W
Thermal Resistance from Junction to Ambient	R _{θJA} ^⑤	50	75	°C/W

Typical Characteristics

ELECTRICAL CHARACTERISTICS ($T_J=25^\circ\text{C}$ unless otherwise specified)

Static Characteristics

Parameter	Symbol	Test Condition	Value			Unit	
			Min	Typ	Max		
Drain-source breakdown voltage	$V_{(BR)DSS}$	$V_{GS}=0V, I_D=250\mu A$	100	-	-	V	
Zero gate voltage drain current	I_{DSS}	$V_{DS}=100V,$ $V_{GS}=0V$	$T_J=25^\circ\text{C}$	-	-	1.0	μA
			$T_J=125^\circ\text{C}$	-	-	100	
Gate-body leakage current	I_{GSS}	$V_{GS}=\pm 20V, V_{DS}=0V$	-	-	± 100	nA	
Gate-threshold voltage	$V_{GS(th)}$	$V_{DS}=V_{GS}, I_D=250\mu A$	2.0	3.0	4.0	V	
Static drain-source on-state resistance	$R_{DS(on)}^{(4)}$	$V_{GS}=10V,$ $I_D=10A$	$T_J=25^\circ\text{C}$	-	14	17	m Ω
			$T_J=125^\circ\text{C}$	-	24	29	
Forward transconductance	g_{FS}	$V_{DS}=5V, I_D=20A$	-	19	-	S	

Dynamic Characteristics⁽⁶⁾

Input capacitance	C_{iss}	$V_{GS}=0V, V_{DS}=50V,$ $f=1\text{MHz}$	-	925	-	μF
Output capacitance	C_{oss}		-	177	-	
Reverse transfer capacitance	C_{rss}		-	3	-	
Gate resistance	R_g	$f=1\text{MHz}$	-	2	-	Ω
Total gate charge	Q_g	$V_{GS}=10V, V_{DS}=50V, I_D=10A$	-	18.2	-	
Gate charge at threshold	$Q_{G(th)}$		-	3.0	-	
Gate-source charge	Q_{gs}		-	4.6	-	
Gate-drain charge	Q_{gd}		-	5.6	-	
Turn-on delay time	$t_{d(on)}$	$V_{DD}=20V, V_{GS}=10V,$ $R_L=2.6\Omega, R_g=10\Omega$	-	8.7	-	ns
Turn-on rise time	t_r		-	5.5	-	
Turn-off delay time	$t_{d(off)}$		-	14.4	-	
Turn-off fall time	t_f		-	7.5	-	







Reverse Diode Characteristics

Drain-source diode forward voltage	$V_{SD}^{(1)}$	$V_{GS}=0V, I_S=10A$	-	-	1.2	V
Continuous drain-source diode forward current	$I_S^{(1)}$		-	-	40	A
Pulsed drain-source diode forward current	$I_{SM}^{(1)(2)}$		-	-	160	A
Reverse recovery time	t_{rr}	$V_{DD}=50V, I_S=10A,$	-	20	-	ns
Reverse recovery charge	Q_{rr}	$di_S/dt=500A/\mu s$	-	88	-	nC

Notes:


- ①. $T_C=25^\circ\text{C}$ Limited only by maximum temperature allowed.
- ②. $P_w \leq 10\mu s$, Duty cycle $\leq 1\%$.
- ③. EAS condition: $V_{DD}=50V, V_{GS}=10V, L=0.5\text{mH}, R_g=25\Omega$ Starting $T_J=25^\circ\text{C}$.
- ④. Pulse Test : Pulse Width $\leq 380\mu s$, duty cycle $\leq 2\%$.
- ⑤. Guaranteed by design, not subject to production.
- ⑥. Device mounted on 1 in² FR-4 board with 2oz. double-sided Copper, in a still air environment with $T_A=25^\circ\text{C}$.

Typical Characteristics

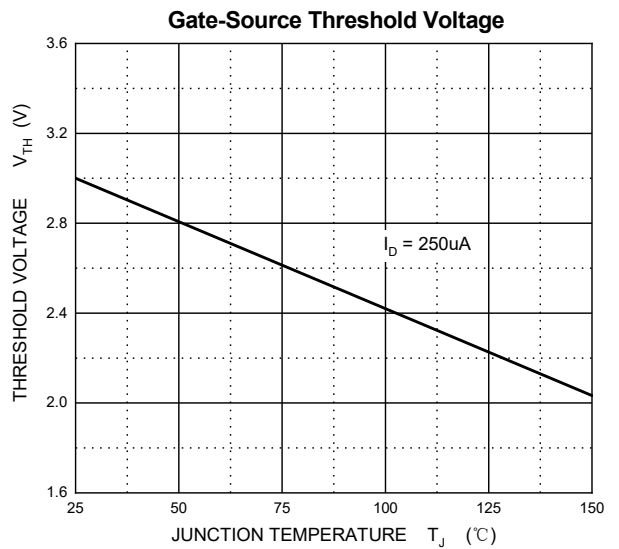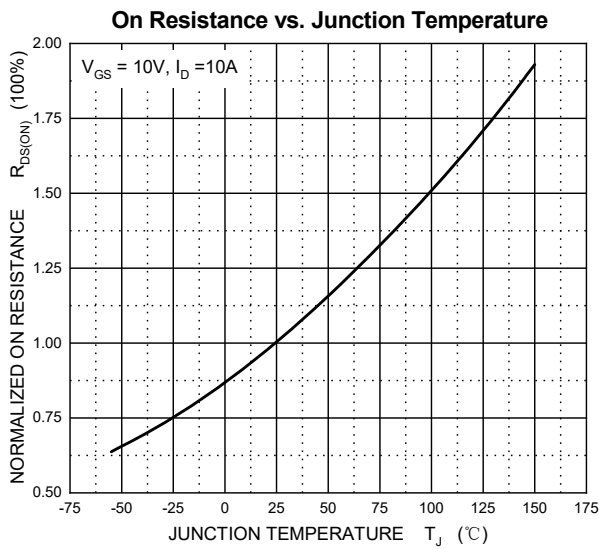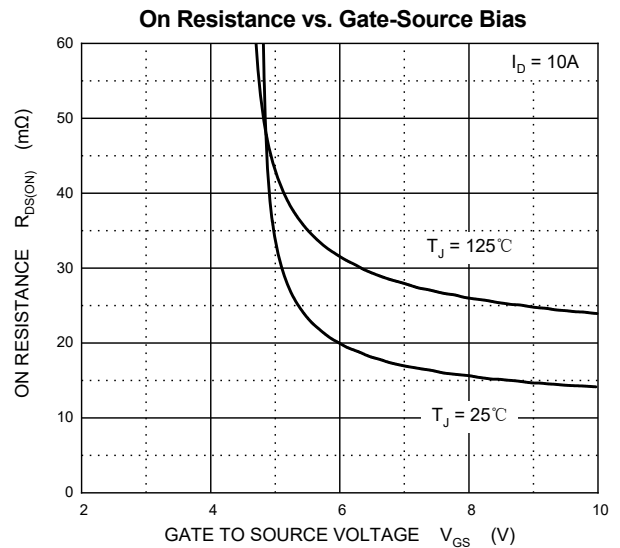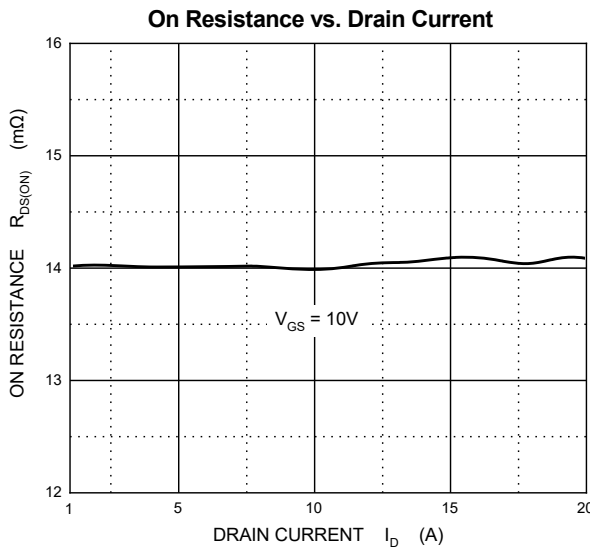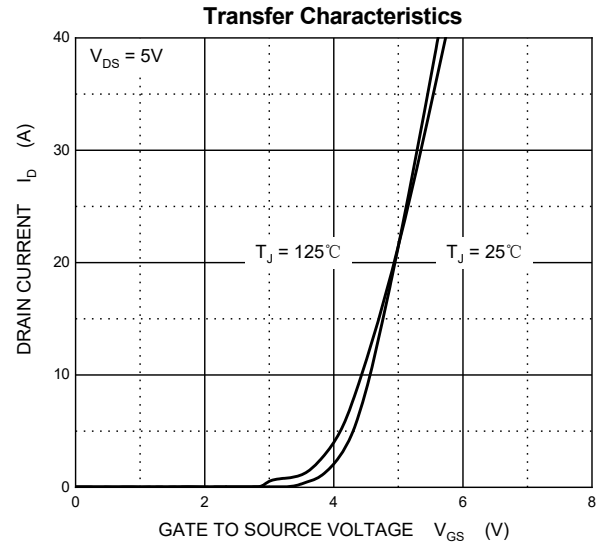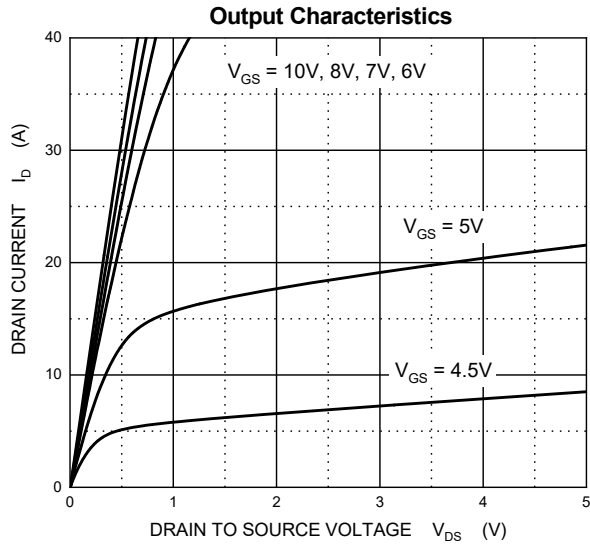


Typical Characteristics


Typical Capacitances

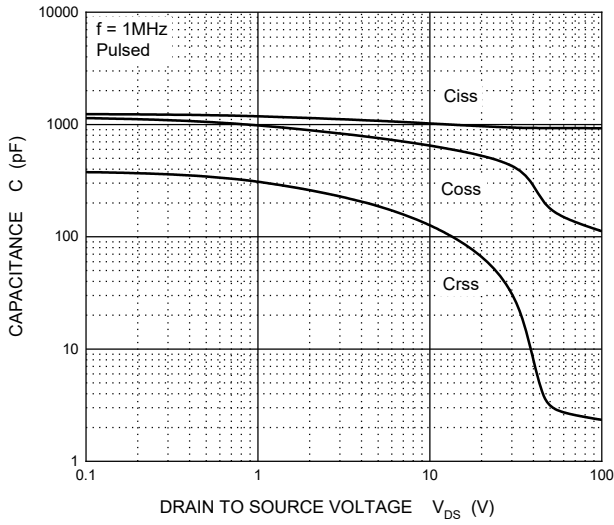


Gate Charge

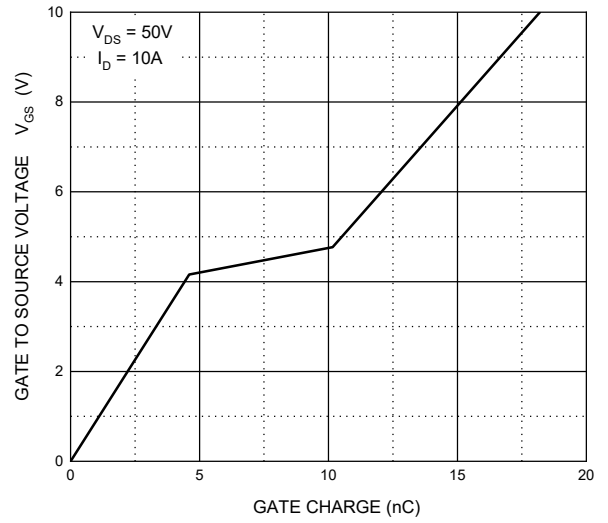


Source-Drain Diode Forward Characteristics

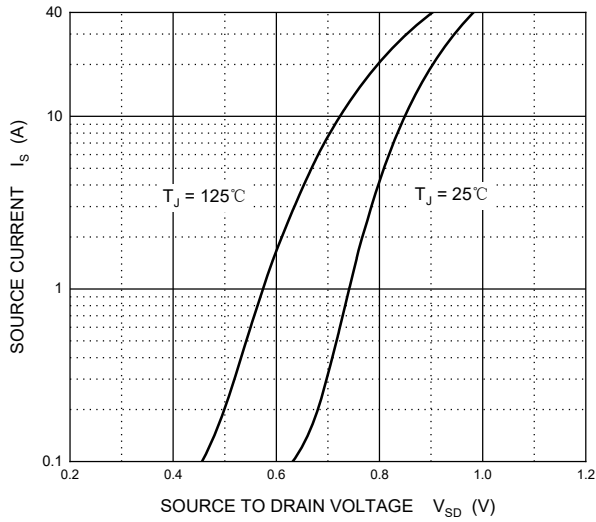


Maximum Safe Operating Area

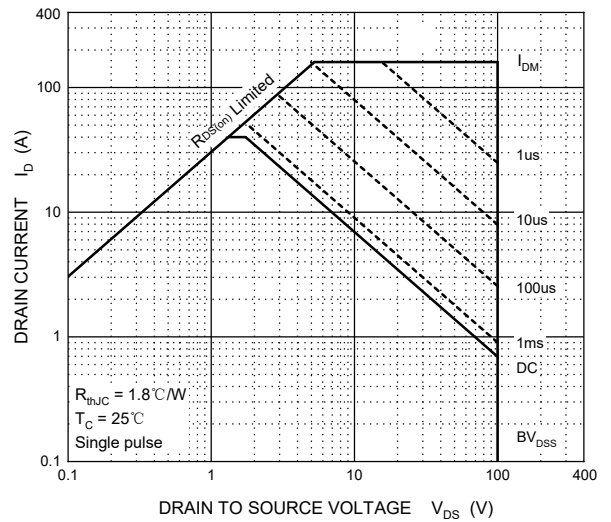



Drain-Source Breakdown Voltage

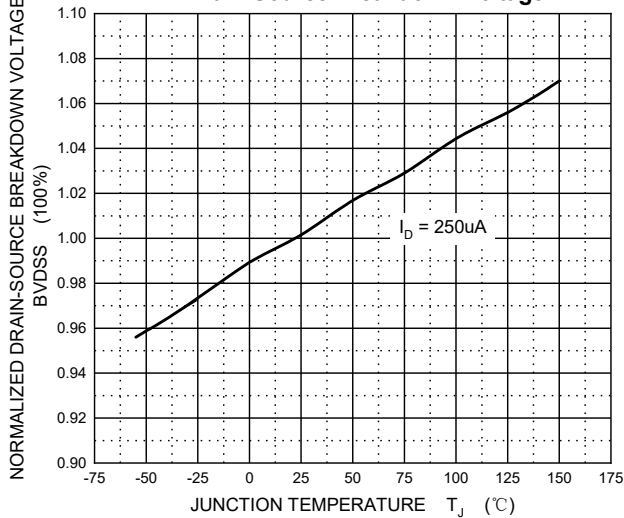



Typical Characteristics

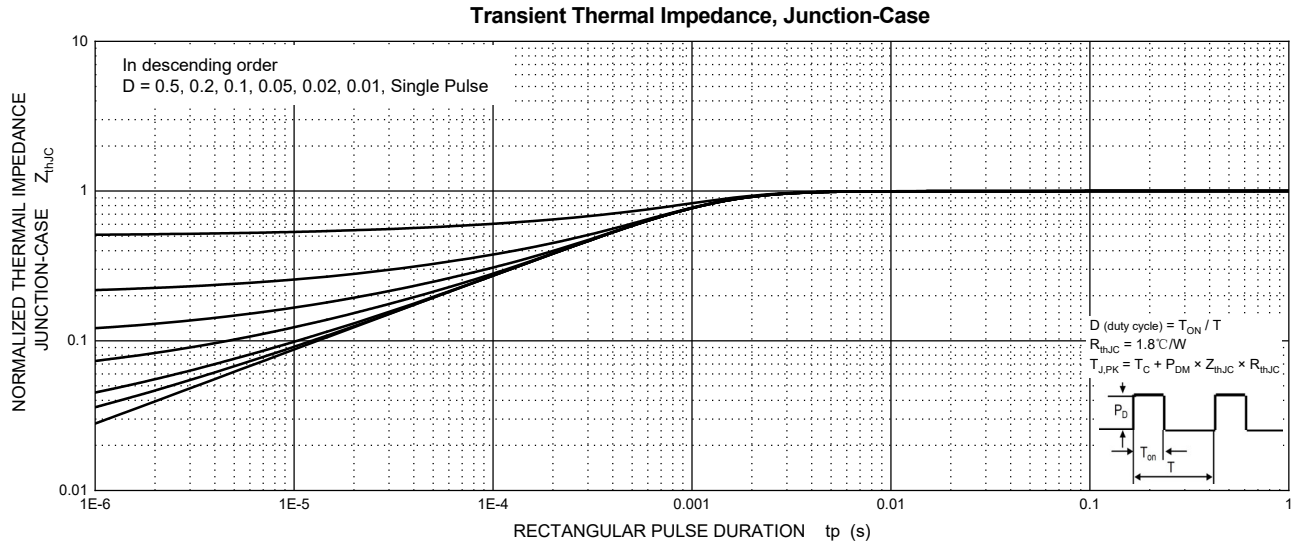



Gate Charge

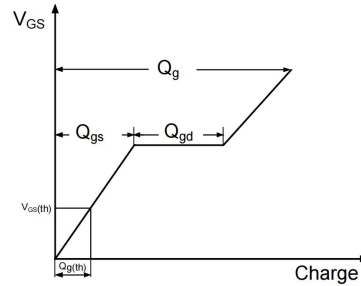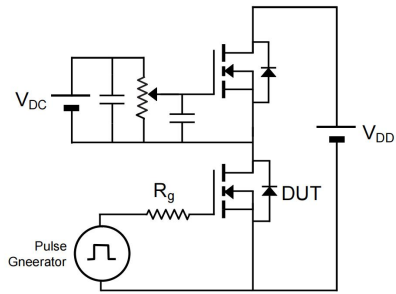



Resistive Load Switching Time

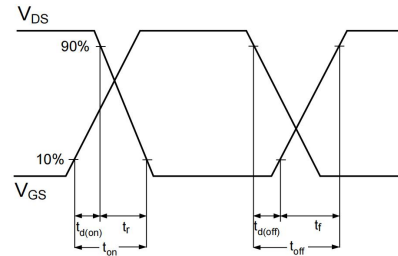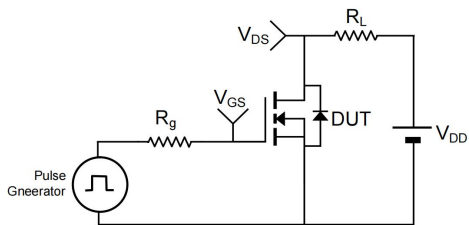


Un-clamped Inductive Load Switching

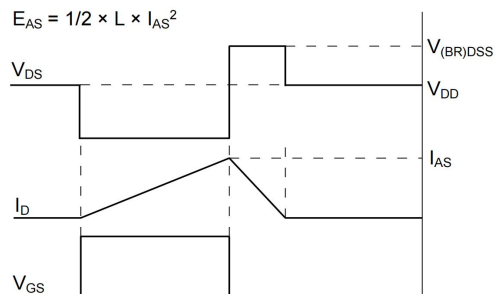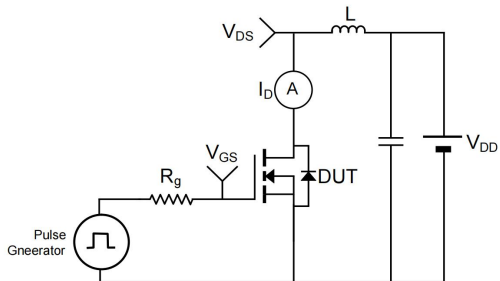


Drain-Source Body Diode Reverse Recovery

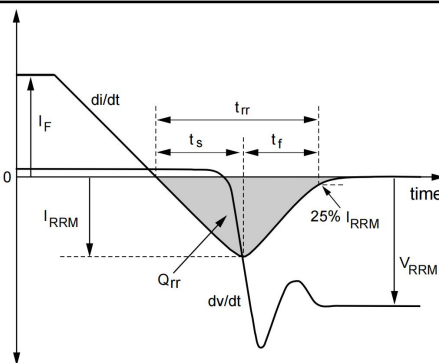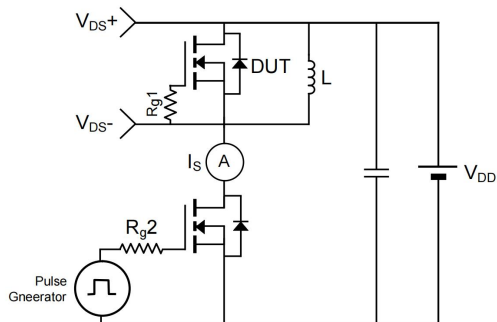


PDFNWB5×6-8L PACKAGE OUTLINE DIMENSIONS

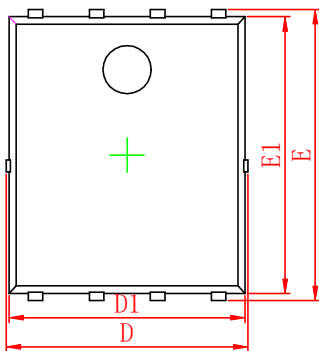

Top View
[顶视图]

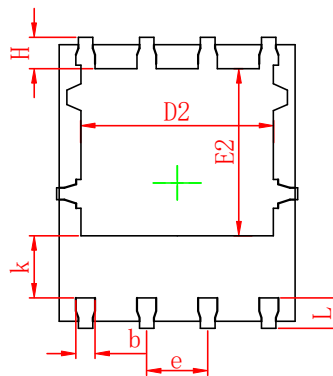

Bottom View
[背视图]




Side View
[侧视图]

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	0.90	1.10	0.035	0.043
A1	0.25 REF.		0.010 REF.	
D	4.90	5.10	0.193	0.201
D1	4.80	5.00	0.189	0.197
D2	3.90	4.10	0.154	0.161
E	5.90	6.10	0.232	0.240
E1	5.65	5.85	0.222	0.230
E2	3.35	3.65	0.132	0.144
k	1.20	1.50	0.047	0.059
b	0.20	0.45	0.008	0.018
e	1.27 BSC		0.050 BSC	
L	0.55	0.75	0.022	0.030
H	0.45	0.75	0.018	0.030

Notes:

- 1 Dimensions exclusive of mold gate burrs.
- 2 Dimensions exclusive of mold flash and cutting burrs.

PDFNWB5×6-8L Suggested Pad Layout

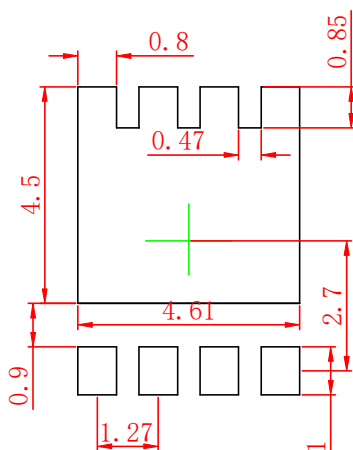

Notes:


- 1 Controlling dimension: in millimeters.
- 2 General tolerance: ±0.05mm.
- 3 The pad layout is for reference purpose only.

NOTICE

JSCJ reserves the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. JSCJ does not assume any liability arising out of the application or use of any product described herein.

PDFNWB5×6-8L Tape and Reel


PDFNWB5×6-8L Embossed Carrier Tape

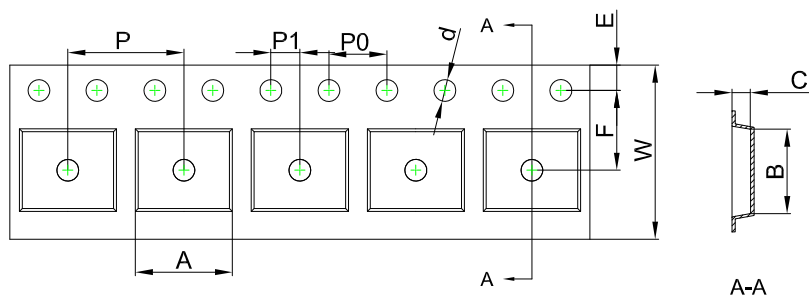


Packaging Description:
PDFNWB5×6-8L parts are shipped in tape. The carrier tape is made from a dissipative (carbon filled) polycarbonate resin. The cover tape is a multilayer film (Heat Activated Adhesive in nature) primarily composed of polyester film, adhesive layer, sealant, and anti-static sprayed agent. These reeled parts in standard option are shipped with 5,000 units per 13" or 33.0 cm diameter reel. The reels are clear in color and is made of polystyrene plastic (anti-static coated).

Dimensions are in millimeter										
Pkg type	A	B	C	d	E	F	P0	P	P1	W
PDFNWB5×6-8L	6.30	5.30	1.10	Ø1.50	1.75	5.50	4.00	8.00	2.00	12.00

PDFNWB5×6-8L Tape Leader and Trailer

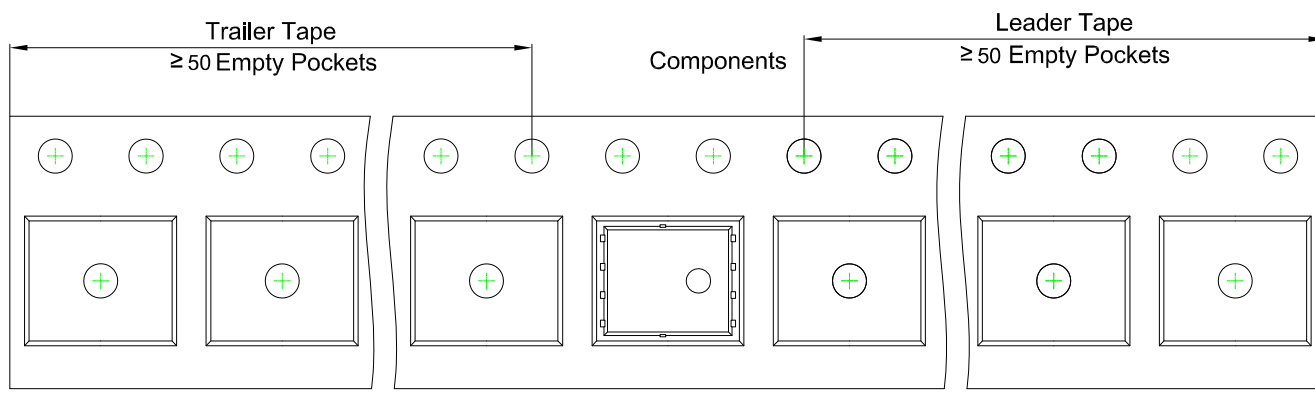

PDFNWB5×6-8L Reel

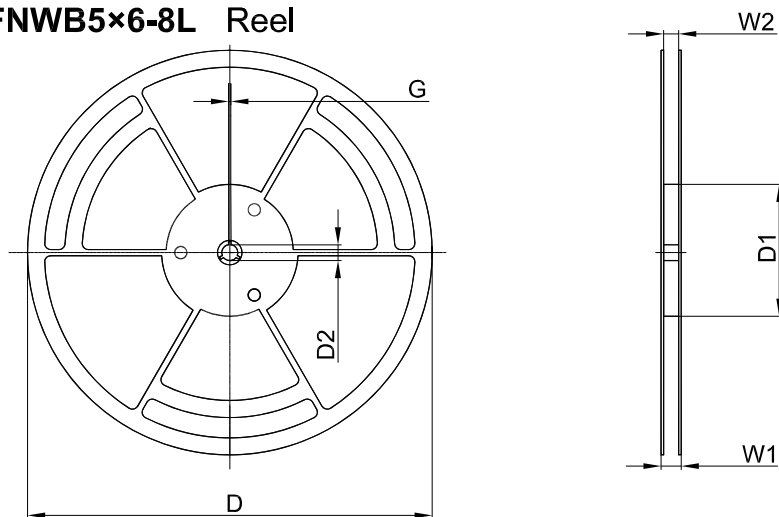

Dimensions are in millimeter						
Reel Option	D	D1	D2	G	W1	W2
13" Dia	φ330.00	100.00	13.00	1.90	17.60	12.40

Reel	Reel Size	Box	Box Size (mm)	Carton	Carton Size (mm)
5,000 pcs	13 inch	10,000 pcs	360×360×65	50,000 pcs	378×358×382