




PDFNK 6 5×6-8L Plastic-Encapsulate MOSFETS

CJAC65SN10L N-Channel Power MOSFET

$V_{(BR)DSS}$	$R_{DS(on)TYP}$	I_D
FEX	11m OFEX	ICE
	F5.5{ OIE X	

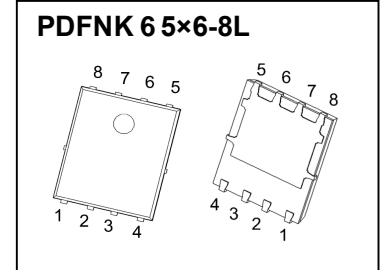

DESCRIPTION

V@Á ÔRÔÍ ÛPFLÁ~••Á SGTÁ c&@ [[*^ Á æ áÁÁ•ã } Áç Á] ;| çã^Á
 ^ç&||^} cÜ ÖÜQPD, Á ãÖ||, Á æ^Á&@*^ ÉQÁ&á ÁÁÁ•^áÁ Áá, ã^Áçáç Á
 [Áç] |ãçã }•Á


FEATURES

- Pã ÖÚ, ^|Áæ áÁ&||^} cÖæ áá * Áçã çããç
- Š| çãÁ, æ&@
- Pã ÖÚ^}•ã Á&||ÁÁ•ã } Áç |Á|çã||, Ä ÖÜQPD
- Š^ çãÁ^Á| | á~ &öÁ Áæ~ á^á
- Ö| [áÁ çããç Áæ áÁ } á| | ç Á çãçã ÖÜ
- Öç&||^} ç| çã æ^Áç |Á [[áÁ çããã • ç çã }

APPLICATIONS


- ÛT ÛÜÁæ áÁ^} ^|çãÁ ~ | | [•^Áæ] |ãçã }•
- PãáÁ, æ&@ áÁæ áÁçã ÖÁ^~^} & Áá& æ
- W; çã||^} çã|ÁÚ, ^|ÁÚ^] | |
- Ú|, ^|Á çæ æ^ (^ } c

MARKING



ÔRÔÍ65SN10L MÚçãç [ÉÁ
 Û| |ãÁ [çMÚç FÁ çãçã |ÉÁ
 ÝÝ MÔ| á^ÉÁ

EQUIVALENT CIRCUIT



ABSOLUTE MAXIMUM RATINGS (T_a=25°C unless otherwise noted)

Parameter	Symbol	Value	Unit
Drain-Source Voltage	V _{DS}	100	V
Gate-Source Voltage	V _{GS}	±20	V
Continuous Drain Current	I _D ^①	65	A
Pulsed Drain Current	I _{DM} ^②	260	A
Single Pulsed Avalanche Energy	E _{AS} ^③	125	mJ
Maximum Power Dissipation	P _D ^①	96	W
Thermal Resistance from Junction to Ambient	R _{θJA} ^⑥	50	°C/W
Thermal Resistance from Junction to Case	R _{θJC} ^①	1.3	°C/W
Operating Junction and Storage Temperature Range	T _J , T _{stg}	-55~+150	°C

MOSFET ELECTRICAL CHARACTERISTICS

$T_a=25^\circ\text{C}$ unless otherwise specified

Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
Off characteristics						
Drain-source breakdown voltage	$V_{(BR)DSS}$	$V_{GS} = 0V, I_D = 250\mu A$	100			V
Zero gate voltage drain current	I_{DSS}	$V_{DS} = 80V, V_{GS} = 0V$	$T_J = 25^\circ\text{C}$		1.0	μA
			$T_J = 125^\circ\text{C}$		100	
Gate-body leakage current	I_{GSS}	$V_{DS} = 0V, V_{GS} = \pm 20V$			± 100	nA
On characteristics ^④						
Gate-threshold voltage	$V_{GS(th)}$	$V_{DS} = V_{GS}, I_D = 250\mu A$	1.0	2.1	2.5	V
Static drain-source on-state resistance	$R_{DS(on)}$	$V_{GS} = 10V, I_D = 20A$		11	13.5	$m\Omega$
		$V_{GS} = 4.5V, I_D = 10A$		15.5	21	$m\Omega$
Dynamic characteristics ^{④ ⑤}						
Input capacitance	C_{iss}	$V_{DS} = 50V, V_{GS} = 0V, f = 500kHz$		1285		pF
Output capacitance	C_{oss}			275		
Reverse transfer capacitance	C_{rss}			5.5		
Gate resistance	R_g	$f = 1MHz$		3.6		Ω
Switching characteristics ^{④ ⑤}						
Total gate charge	Q_g	$V_{GS} = 10V, V_{DS} = 30V, I_D = 25A$		23.0		nC
Gate-source charge	Q_{gs}			3.0		
Gate-drain charge	Q_{gd}			5.1		
Turn-on delay time	$t_{d(on)}$	$V_{DS} = 30V, I_D = 10A, V_{GS} = 10V, R_G = 10\Omega$		34		ns
Turn-on rise time	t_r			33		
Turn-off delay time	$t_{d(off)}$			156		
Turn-off fall time	t_f			86		
Drain-Source Diode Characteristics						
Drain-source diode forward voltage	V_{SD} ^④	$V_{GS} = 0V, I_S = 20A$			1.2	V
Continuous drain-source diode forward current	I_S ^①				65	A
Pulsed drain-source diode forward current	I_{SM} ^②				260	A

Ⓜ [0.1A

1. $T_C = 25^\circ\text{C}$ Limited only by maximum temperature allowed.

2. $P_W \leq 10\mu s$, Duty cycle $\leq 1\%$.







3. EAS condition: $V_{DD} = 50V, V_{GS} = 10V, L = 0.5mH, R_g = 25\Omega$ Starting $T_J = 25^\circ\text{C}$.

4. Pulse Test : Pulse Width $\leq 300\mu s$, duty cycle $\leq 2\%$.

5. Guaranteed by design, not subject to production.


6. The value of $R_{\theta JA}$ is measured with the device mounted on 1 in² FR-4 board with 2oz. Copper, in a still air environment with $T_a = 25^\circ\text{C}$.

Typical Characteristics

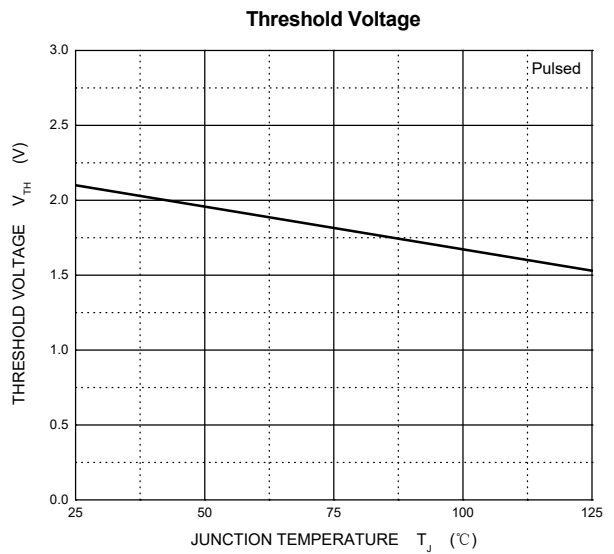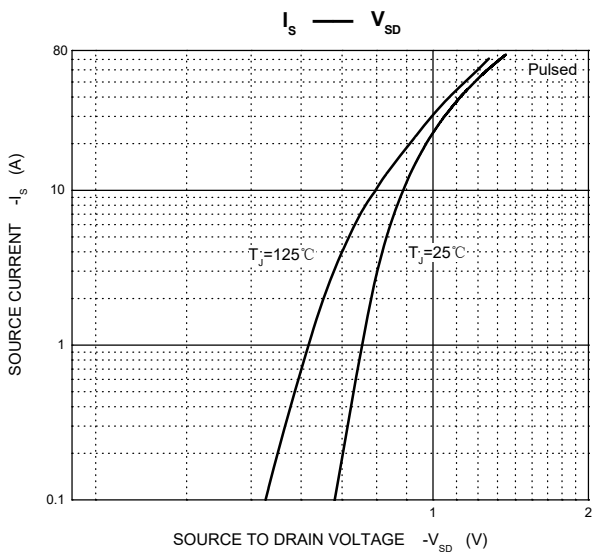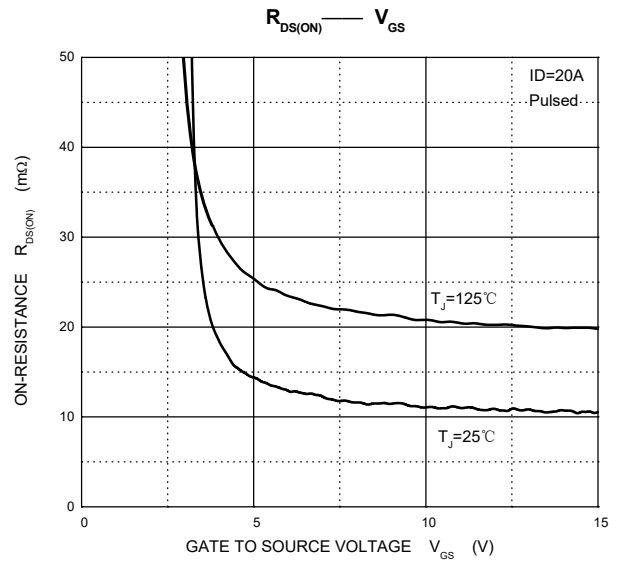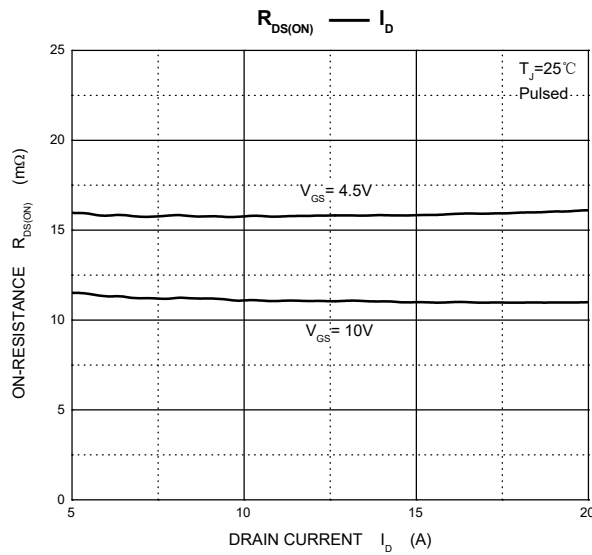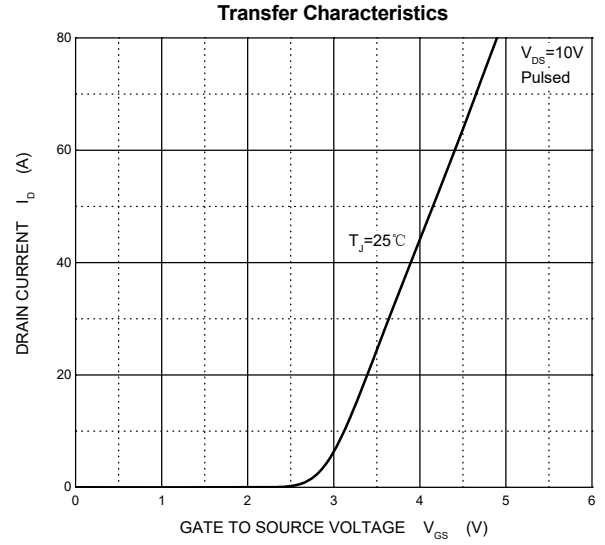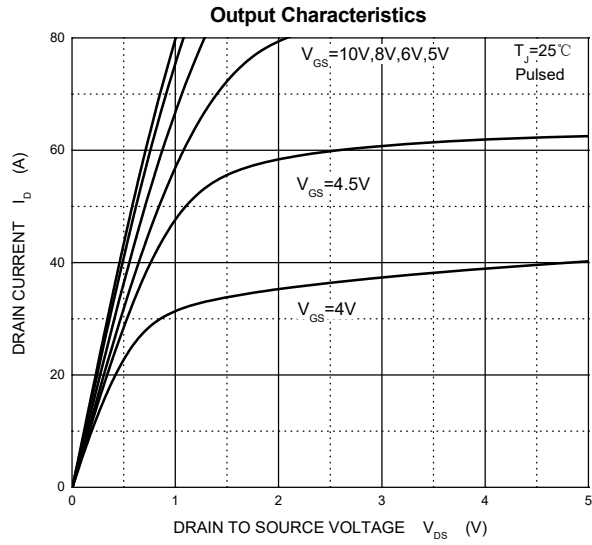


Typical Characteristics


Capacitances

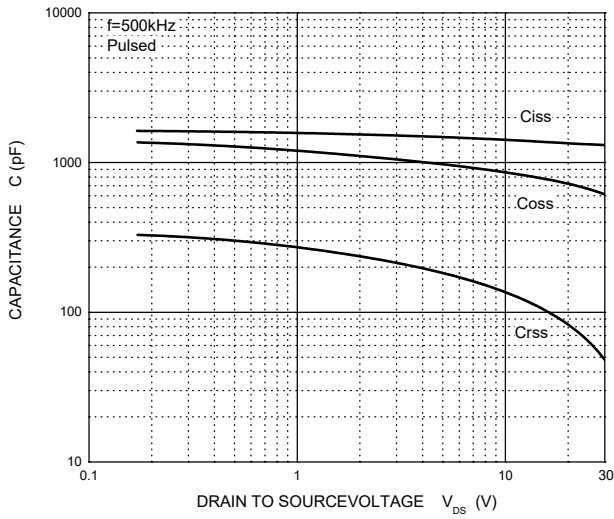


Gate Charge

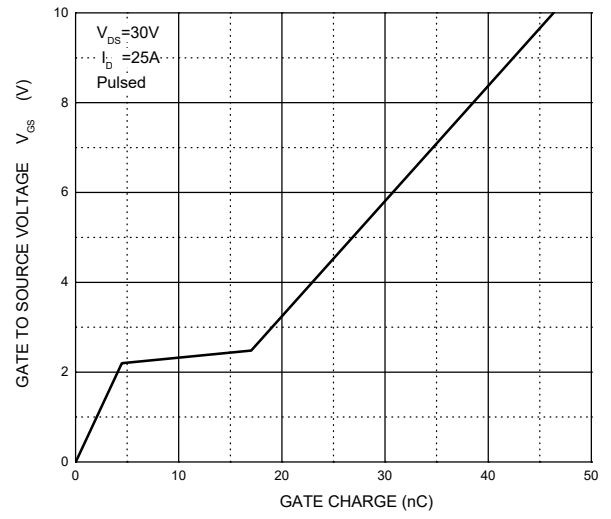


NORMALIZED TRANSIENT THERMAL IMPEDANCE

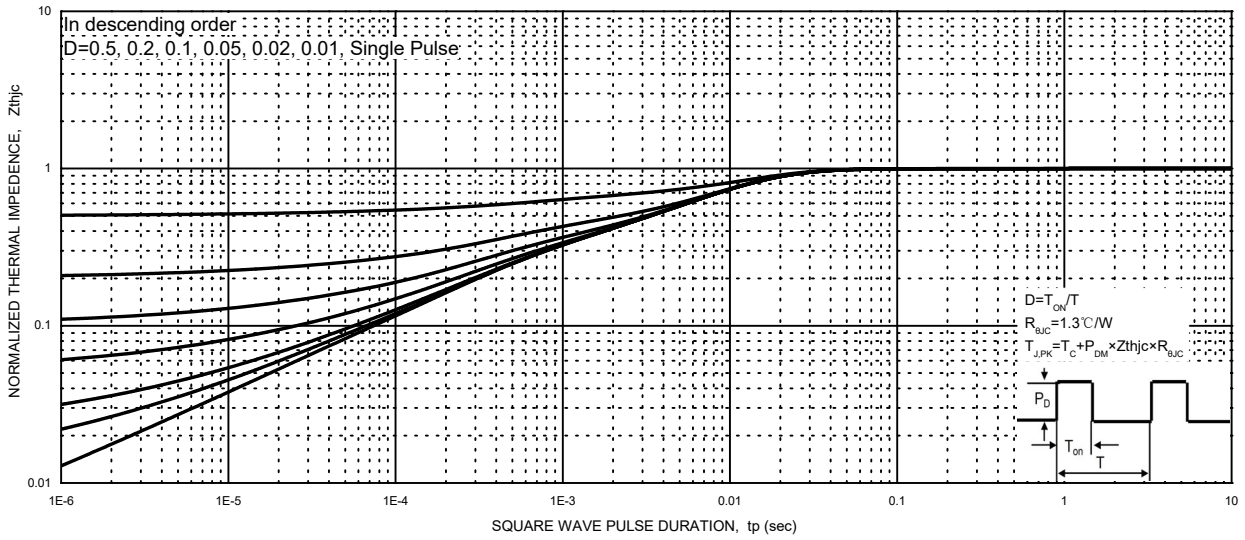


MAXIMUM FORWARD BIASED SAFE OPERATING AREA

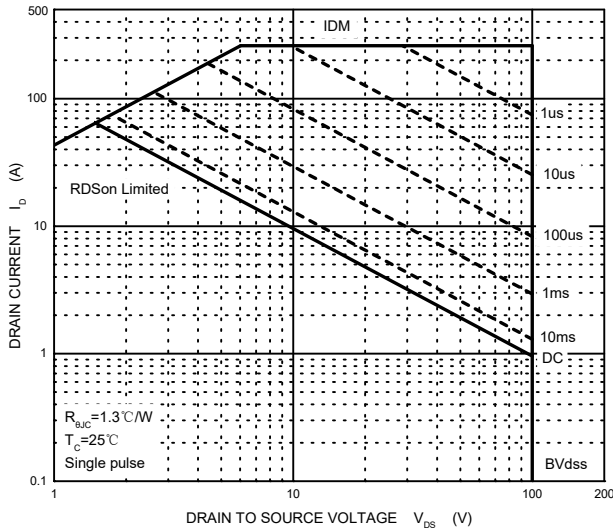


PDFNWB5×6-8L PACKAGE OUTLINE DIMENSIONS

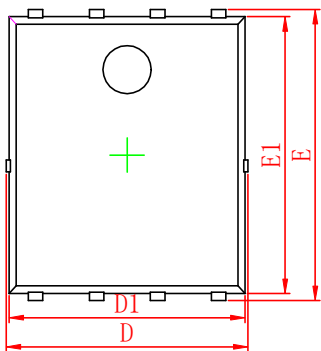

Top View
[顶视图]

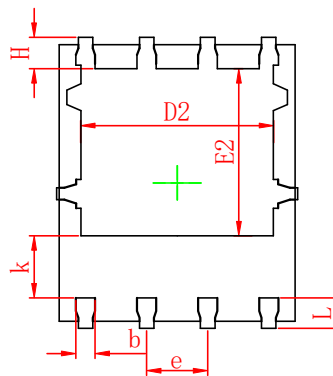

Bottom View
[背视图]

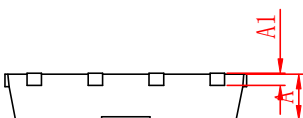


Side View
[侧视图]

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	0.90	1.10	0.035	0.043
A1	0.25 REF.		0.010 REF.	
D	4.90	5.10	0.193	0.201
D1	4.80	5.00	0.189	0.197
D2	3.90	4.10	0.154	0.161
E	5.90	6.10	0.232	0.240
E1	5.65	5.85	0.222	0.230
E2	3.35	3.65	0.132	0.144
k	1.20	1.50	0.047	0.059
b	0.20	0.45	0.008	0.018
e	1.27 BSC		0.050 BSC	
L	0.55	0.75	0.022	0.030
H	0.45	0.75	0.018	0.030

Notes:

- 1 Dimensions exclusive of mold gate burrs.
- 2 Dimensions exclusive of mold flash and cutting burrs.

PDFNWB5×6-8L Suggested Pad Layout

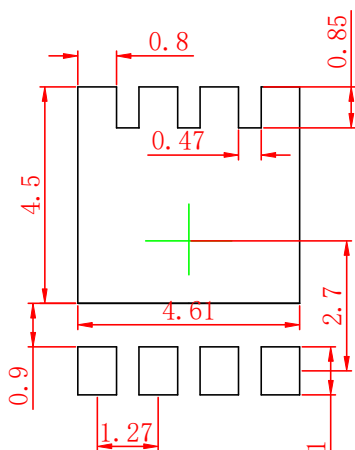

Notes:

- 1 Controlling dimension: in millimeters.
- 2 General tolerance: $\pm 0.05\text{mm}$.
- 3 The pad layout is for reference purpose only.

NOTICE

JSCJ reserves the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. JSCJ does not assume any liability arising out of the application or use of any product described herein.

PDFNWB5×6-8L Tape and Reel


PDFNWB5×6-8L Embossed Carrier Tape




Packaging Description:
PDFNWB5×6-8L parts are shipped in tape. The carrier tape is made from a dissipative (carbon filled) polycarbonate resin. The cover tape is a multilayer film (Heat Activated Adhesive in nature) primarily composed of polyester film, adhesive layer, sealant, and anti-static sprayed agent. These reeled parts in standard option are shipped with 5,000 units per 13" or 33.0 cm diameter reel. The reels are clear in color and is made of polystyrene plastic (anti-static coated).

Dimensions are in millimeter										
Pkg type	A	B	C	d	E	F	P0	P	P1	W
PDFNWB5×6-8L	6.30	5.30	1.10	Ø1.50	1.75	5.50	4.00	8.00	2.00	12.00

PDFNWB5×6-8L Tape Leader and Trailer

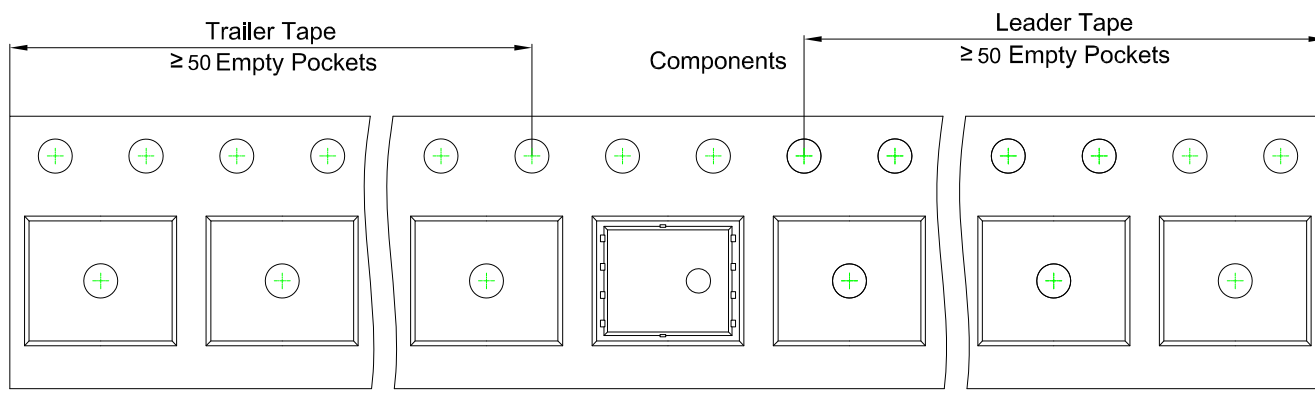

PDFNWB5×6-8L Reel

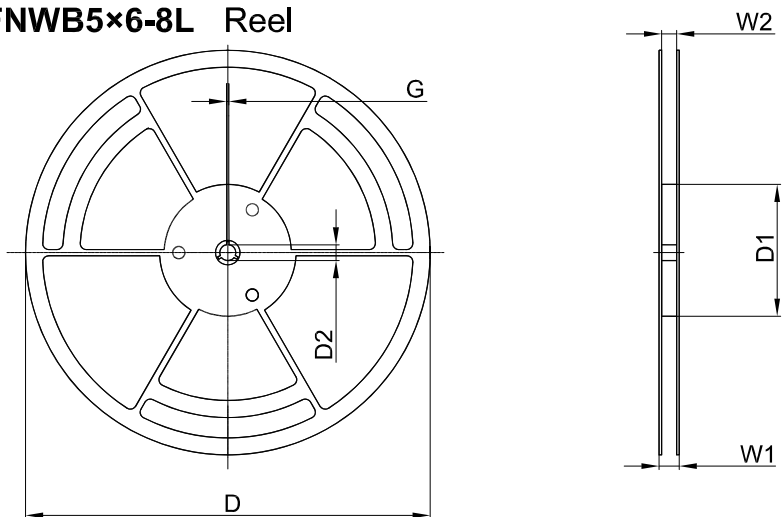

Dimensions are in millimeter						
Reel Option	D	D1	D2	G	W1	W2
13" Dia	φ330.00	100.00	13.00	1.90	17.60	12.40

Reel	Reel Size	Box	Box Size (mm)	Carton	Carton Size (mm)
5,000 pcs	13 inch	10,000 pcs	360×360×65	50,000 pcs	378×358×382