


TO-220F-B Plastic-Encapsulate MOSFETS

CJPF07N80M1 N-Channel Power MOSFET

$V_{(BR)DSS}$	$R_{DS(on)TYP}$	I_D
800V	1.2Ω@10V	7A

GENERAL DESCRIPTION

This advanced high voltage MOSFET is designed to stand high energy in the avalanche mode and switch efficiently. This new high energy device also offers a drain-to-source diode fast recovery time. Designed for high voltage, high speed switching applications such as power supplies, converters, power motor controls and bridge circuits.

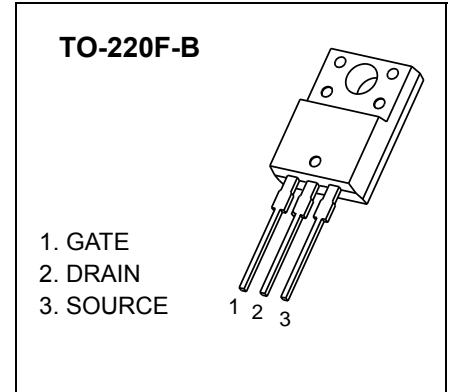

FEATURE


- High Current Rating
- Low Gate Charge
- Low Reverse Transfer Capacitance
- Fast Switching Capability
- Tighter V_{SD} Specifications
- Avalanche Energy Specified

MARKING



07N80M1= Device code.
Solid dot = Green molding compound device, if none, the normal device
XXXX = Code

EQUIVALENT CIRCUIT



MAXIMUM RATINGS ($T_J=25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Limit	Unit
Drain-Source Voltage	V_{DS}	800	V
Gate-Source Voltage	V_{GS}	±30	V
Continuous Drain Current	I_D ①	7	A
Pulsed Drain Current	I_{DM} ①②	28	A
Single Pulsed Avalanche Energy	E_{AS} ③	970	mJ
Power Dissipation	P_D ①	83	W
Thermal Resistance from Junction to Ambient	$R_{\theta JA}$ ⑥	62.5	$^\circ\text{C/W}$
Thermal Resistance from Junction to Case	$R_{\theta JC}$ ①	1.5	$^\circ\text{C/W}$
Operating Junction and Storage Temperature Range	T_J, T_{stg}	-55~+150	$^\circ\text{C}$

MOSFET ELECTRICAL CHARACTERISTICS







$T_J=25^{\circ}\text{C}$ unless otherwise specified

Parameter	Symbol	Test Condition	Min	Typ	Max	Unit	
Off characteristics							
Drain-source breakdown voltage	$V_{(BR)DSS}$	$V_{GS} = 0V, I_D = 250\mu A$	800	-	-	V	
Zero gate voltage drain current	I_{DSS}	$V_{DS}=800V, V_{GS}=0V$	$T_J=25^{\circ}\text{C}$	-	-	25	μA
			$T_J=125^{\circ}\text{C}$	-	-	100	
Gate-body leakage current	I_{GSS}	$V_{DS} = 0V, V_{GS} = \pm 30V$	-	-	± 100	nA	
On characteristics ^④							
Gate-threshold voltage	$V_{GS(th)}$	$V_{DS} = V_{GS}, I_D = 250\mu A$	2.0	3.5	4.0	V	
Static drain-source on-resistance	$R_{DS(on)}$	$V_{GS} = 10V, I_D = 3.5A$	-	1.2	1.8	Ω	
Dynamic characteristics ^⑤							
Input capacitance	C_{iss}	$V_{DS} = 50V, V_{GS} = 0V, f = 1\text{MHz}$	-	1427	-	pF	
Output capacitance	C_{oss}		-	83	-		
Reverse transfer capacitance	C_{rss}		-	8	-		
Gate resistance	R_g	$f = 1\text{MHz}$	-	2.6	-	Ω	
Switching characteristics ^⑤							
Total gate charge	Q_g	$V_{DS} = 50V, V_{GS} = 10V, I_D = 7A$	-	34	-	nC	
Gate-source charge	Q_{gs}		-	7	-		
Gate-drain charge	Q_{gd}		-	13	-		
Turn-on delay time	$t_{d(on)}$	$V_{DD} = 400V, V_{GS} = 10V, R_G = 10\Omega, I_D = 7A$	-	13	-	ns	
Turn-on rise time	t_r		-	13	-		
Turn-off delay time	$t_{d(off)}$		-	53	-		
Turn-off fall time	t_f		-	17	-		
Drain-Source Diode Characteristics							
Drain-source diode forward voltage	V_{SD} ^④	$V_{GS} = 0V, I_S = 7A$	-	-	1.2	V	
Maximum continuous drain-source diode forward current	I_S ^①		-	-	7	A	
Maximum pulsed drain-source diode forward current	I_{SM} ^{①②}		-	-	28	A	
Reverse recovery time	t_{rr}	$dI_F/dt = 100A/\mu s, I_S = 7A, V_{DD} = 50V$	-	439	-	ns	
Reverse recovery charge	Q_{rr}		-	4518	-	nC	

Notes :


- $T_C=25^{\circ}\text{C}$ Limited only by maximum temperature allowed.
- $P_W \leq 10\mu s$, Duty cycle $\leq 1\%$.
- EAS condition: $V_{DD}=150V, V_{GS}=10V, L=10mH, R_g=25\Omega$ Starting $T_J = 25^{\circ}\text{C}$.
- Pulse Test : Pulse Width $\leq 300\mu s$, duty cycle $\leq 2\%$.
- Guaranteed by design, not subject to production.
- The value of $R_{\theta JA}$ is measured with the device in a still air environment with $T_a=25^{\circ}\text{C}$.

Typical Characteristics ($T_J = 25^\circ\text{C}$, unless otherwise specified)

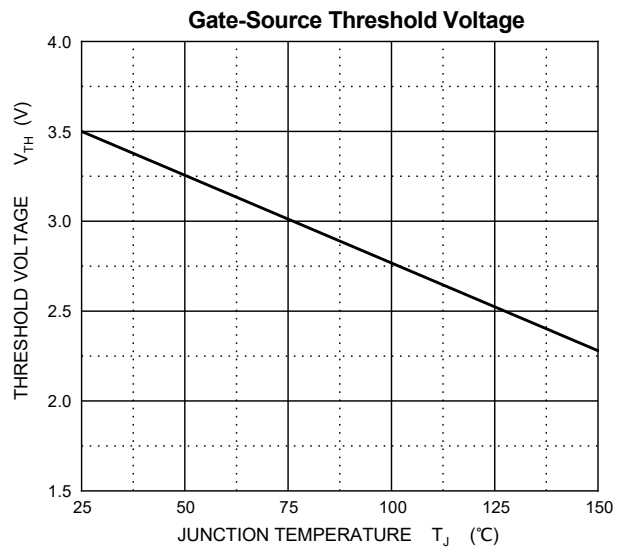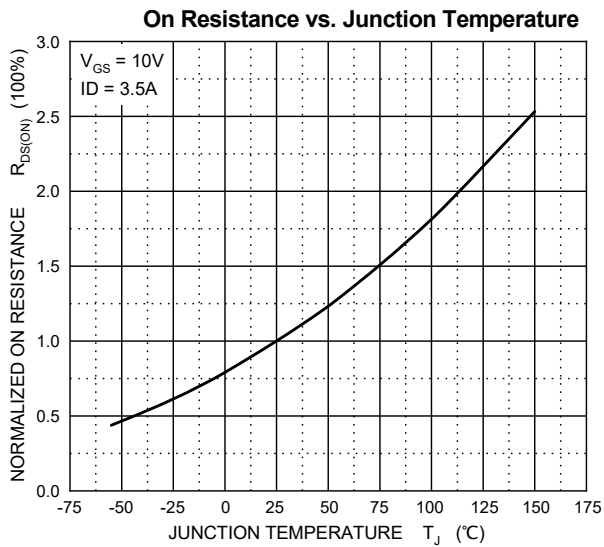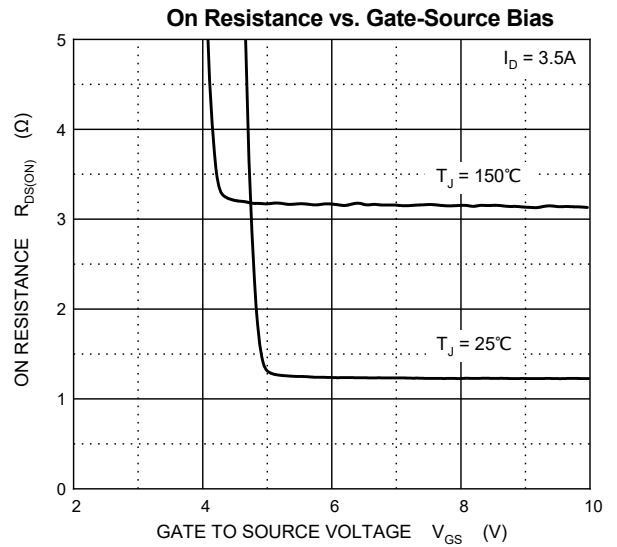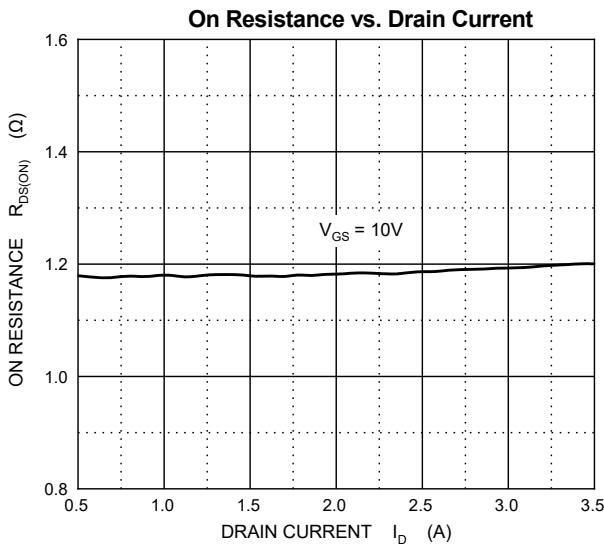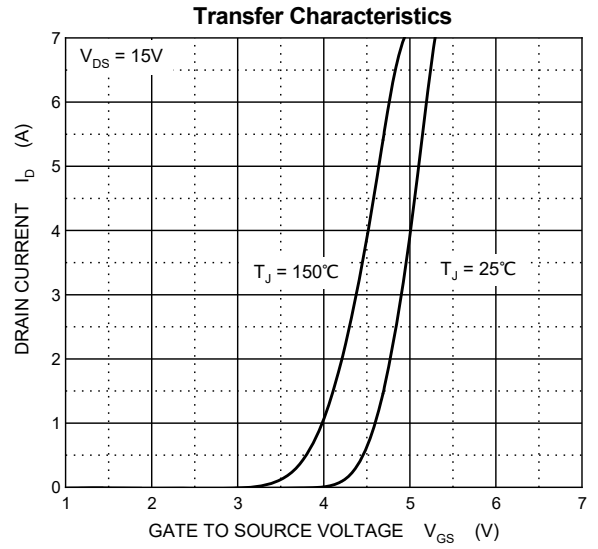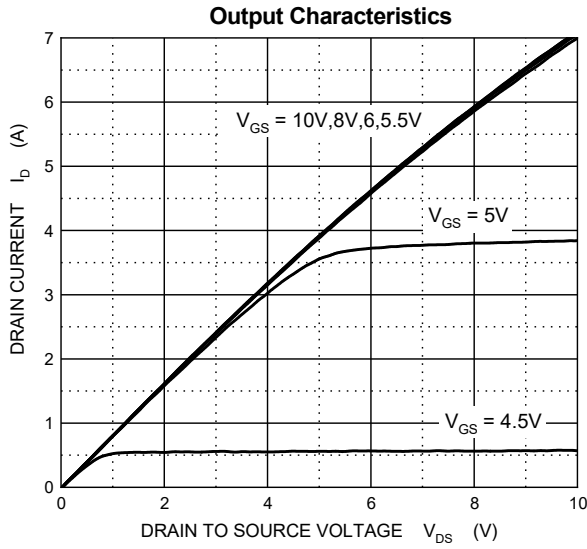


Typical Characteristics (T_J = 25°C, unless otherwise specified)


Typical Capacitances

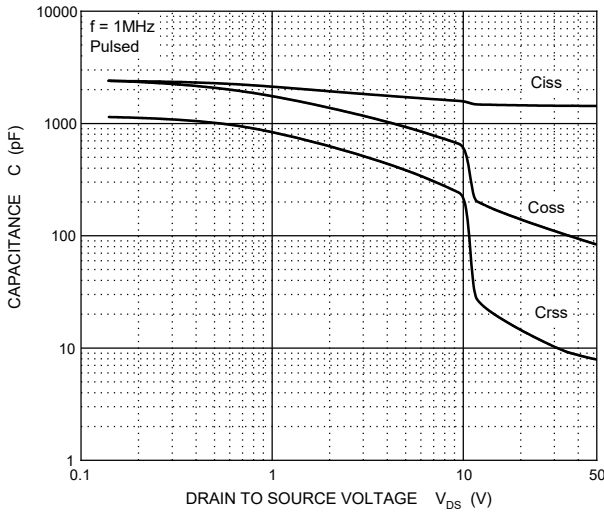


Gate Charge

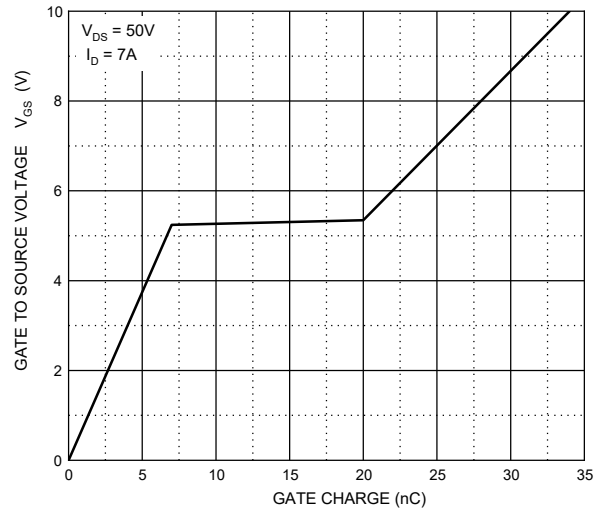


Source-Drain Diode Forward Characteristics

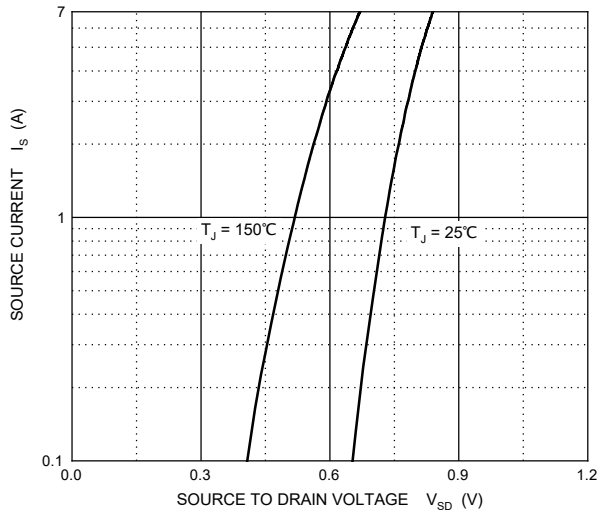


Maximum Safe Operating Area

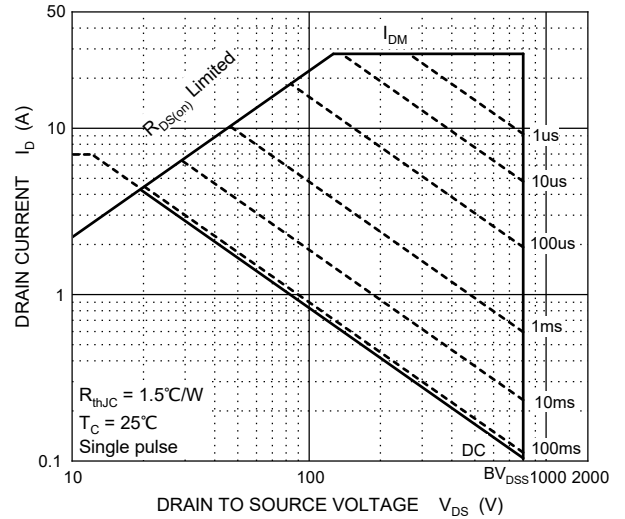

Transient Thermal Impedance, Junction-Case

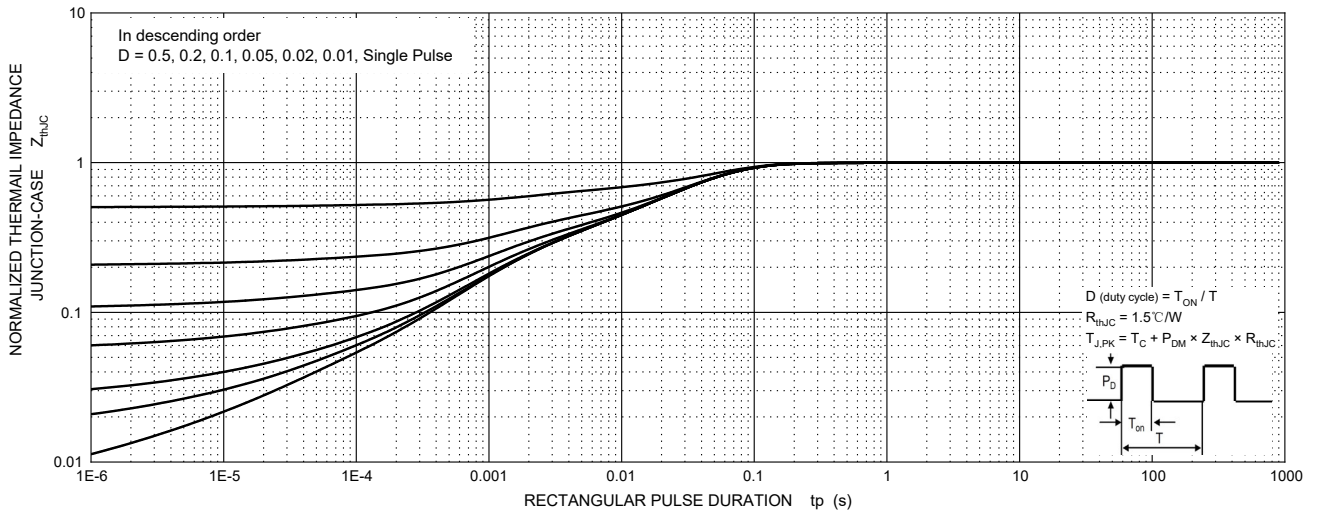

TO-220F-B Package Outline Dimensions

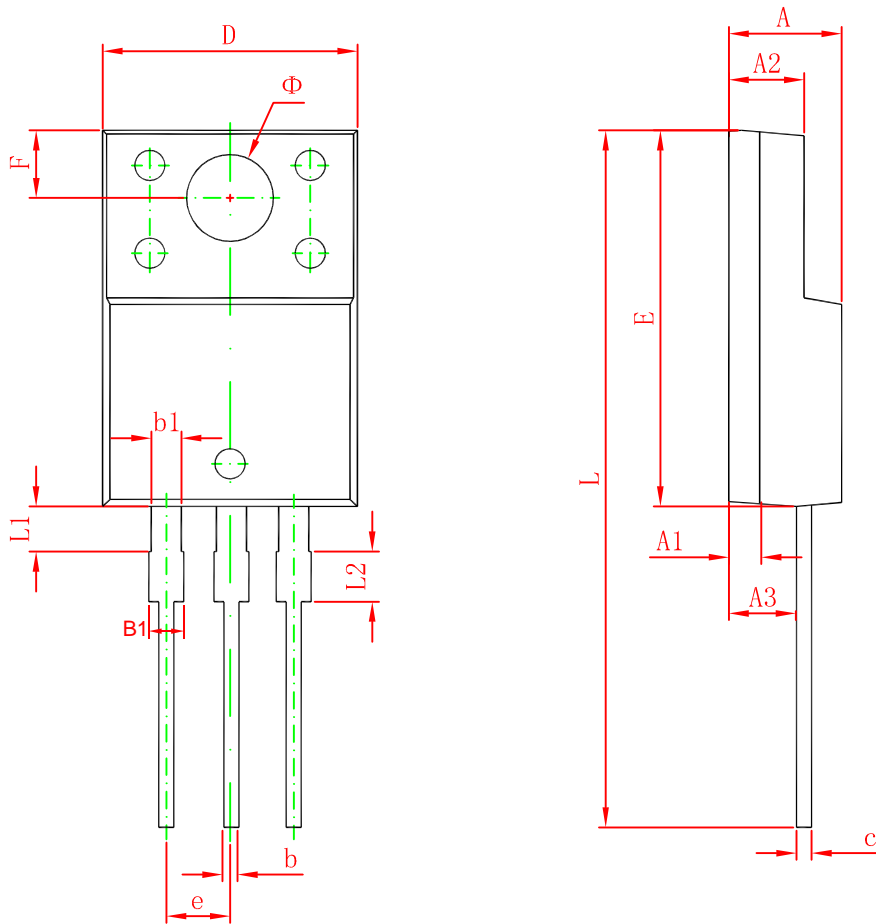

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	4.300	4.700	0.169	0.185
A1	1.200 REF.		0.047 REF.	
A2	2.800	3.200	0.110	0.126
A3	2.500	2.900	0.098	0.114
b	0.710	0.910	0.028	0.036
b1	1.100	1.350	0.043	0.053
B1	1.150	1.400	0.045	0.055
c	0.500	0.750	0.020	0.030
D	9.960	10.360	0.392	0.408
E	14.800	15.200	0.583	0.598
e	2.540 TYP.		0.100 TYP.	
F	2.700 REF.		0.106 REF.	
Φ	3.300	3.700	0.130	0.146
L	28.000	28.400	1.102	1.118
L1	2.100	2.400	0.082	0.094
L2	1.300	1.700	0.051	0.066