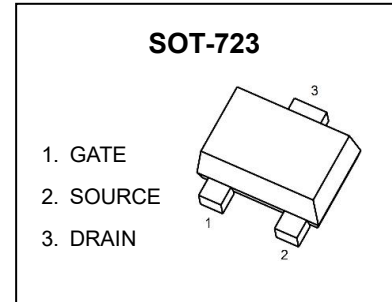


**SOT-723 Plastic-Encapsulate MOSFET****CJ3134KA** N-Channel MOSFET**Key Performance Parameters**

$V_{BR(DSS)}$	$R_{DS(on)TYP}$	I_D
20V	83mΩ@4.5V	1.7A
	107mΩ@2.5V	
	138mΩ@1.8V	

**DESCRIPTION**



This advanced technology has been especially tailored to minimize on-state resistance, provide superior switching performance.

FEATURES

- Battery switch
- Load switch
- High density cell design for ultra low $R_{DS(ON)}$

APPLICATIONS

- SMPS and general purpose applications
- Hard switched and high frequency circuits
- Uninterruptible Power Supply

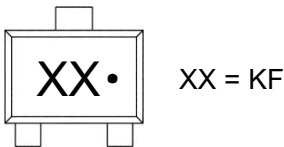MARKING**EQUIVALENT CIRCUIT****ABSOLUTE MAXIMUM RATINGS ($T_A=25^\circ\text{C}$ unless otherwise specified)**

Parameter		Symbol	Value	Unit
Drain-Source Voltage		V_{DS}	20	V
Gate-Source Voltage		V_{GS}	±10	V
Continuous Drain Current	$T_A=25^\circ\text{C}$	$I_D^{\text{⑤}}$	1.7	A
	$T_A=75^\circ\text{C}$		1.3	
Pulsed Drain Current		$I_{DM}^{\text{①②}}$	6.8	A
Power Dissipation		$P_D^{\text{①⑤}}$	0.8	W
Operating Junction and Storage Temperature Range		T_J, T_{stg}	-55~+150	$^\circ\text{C}$

Thermal Characteristics

Parameter	Symbol	Value		Unit
		Typ	Max	
Thermal Resistance from Junction to Ambient	$R_{\theta JA}^{\text{⑥}}$	123	155	$^\circ\text{C/W}$
		Steady State	159	200

Typical Characteristics

ELECTRICAL CHARACTERISTICS ($T_J=25^\circ\text{C}$ unless otherwise specified)

Static Characteristics

Parameter	Symbol	Test Condition	Value			Unit	
			Min	Typ	Max		
Drain-source breakdown voltage	$V_{(BR)DSS}$	$V_{GS}=0V, I_D=250\mu A$	20	-	-	V	
Zero gate voltage drain current	I_{DSS}	$V_{DS}=20V, V_{GS}=0V$	$T_J=25^\circ\text{C}$	-	-	1.0	μA
			$T_J=125^\circ\text{C}$	-	-	100	
Gate-body leakage current	I_{GSS}	$V_{GS}=\pm 10V, V_{DS}=0V$	-	-	± 20	μA	
Gate-threshold voltage	$V_{GS(th)}$	$V_{DS}=V_{GS}, I_D=250\mu A$	0.4	0.65	1.1	V	
Static drain-source on-state resistance	$R_{DS(on)}^{(3)}$	$V_{GS}=4.5V, I_D=0.65A$	$T_J=25^\circ\text{C}$	-	83	110	m Ω
			$T_J=125^\circ\text{C}$	-	121	160	
		$V_{GS}=2.5V, I_D=0.55A$	-	107	150		
		$V_{GS}=1.8V, I_D=0.45A$	-	138	220		
Forward transconductance	g_{FS}	$V_{DS}=10V, I_D=0.8A$	-	2.33	-	S	

Dynamic Characteristics⁽⁴⁾

Input capacitance	C_{iss}	$V_{GS}=0V, V_{DS}=16V,$ $f=1\text{MHz}$	-	52	-	μF
Output capacitance	C_{oss}		-	19	-	
Reverse transfer capacitance	C_{rss}		-	10	-	
Total gate charge	Q_g	$V_{GS}=2.5V, V_{DS}=10V, I_D=1A$	-	0.532	-	nC
Total gate charge	Q_g	$V_{GS}=4.5V, V_{DS}=10V, I_D=1A$	-	0.83	-	
Gate charge at threshold	$Q_{G(th)}$		-	0.085	-	
Gate-source charge	Q_{gs}		-	0.17	-	
Gate-drain charge	Q_{gd}		-	0.14	-	
Turn-on delay time	$t_{d(on)}$	$V_{DD}=10V, V_{GS}=4.5V,$ $I_D=0.5A, R_g=10\Omega$	-	6.6	-	ns
Turn-on rise time	t_r		-	15.2	-	
Turn-off delay time	$t_{d(off)}$		-	103	-	
Turn-off fall time	t_f		-	59	-	







Reverse Diode Characteristics

Drain-source diode forward voltage	$V_{SD}^{(3)}$	$V_{GS}=0V, I_S=0.15A$	-	-	1.2	V
Continuous drain-source diode forward current	$I_S^{(1)}$		-	-	1.7	A
Pulsed drain-source diode forward current	$I_{SM}^{(1)(2)}$		-	-	6.8	A

Notes:


- ①.Limited only by maximum temperature allowed.
- ②. $P_w \leq 10\mu s$, Duty cycle $\leq 1\%$.
- ③.Pulse Test : Pulse Width $\leq 380\mu s$, duty cycle $\leq 2\%$.
- ④.Guaranteed by design, not subject to production.
- ⑤.Device mounted on 1 in² FR-4 board with 2oz. double-sided Copper, in a still air environment with $T_A=25^\circ\text{C}$. The current rating is based on the $t \leq 10s$ thermal resistance rating.

Typical Characteristics

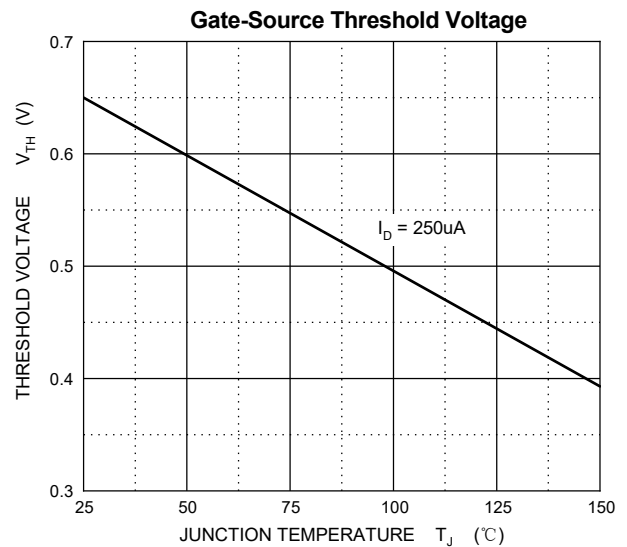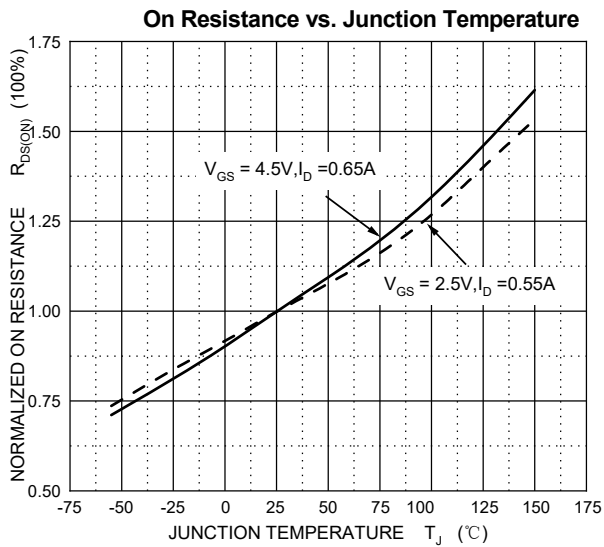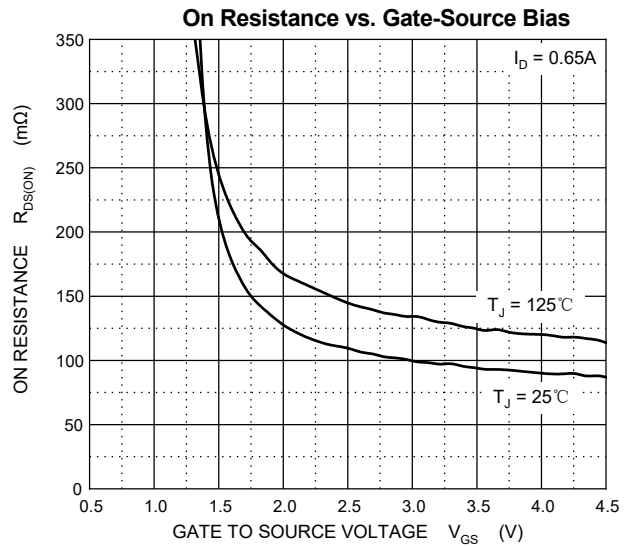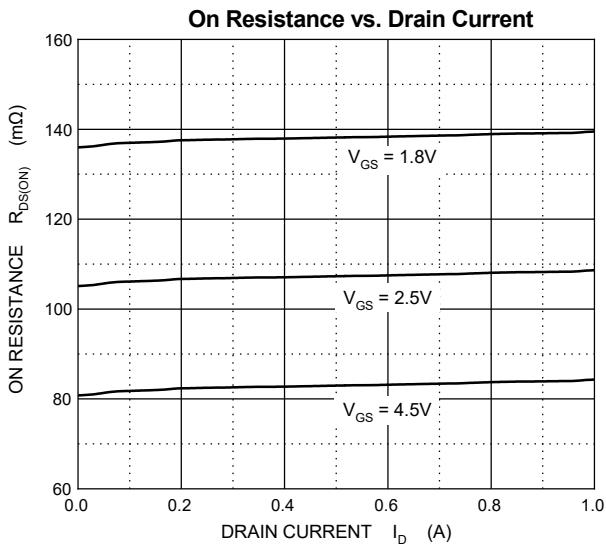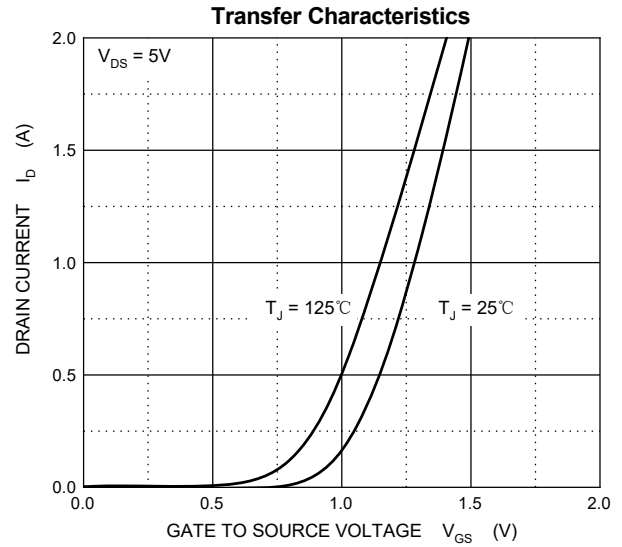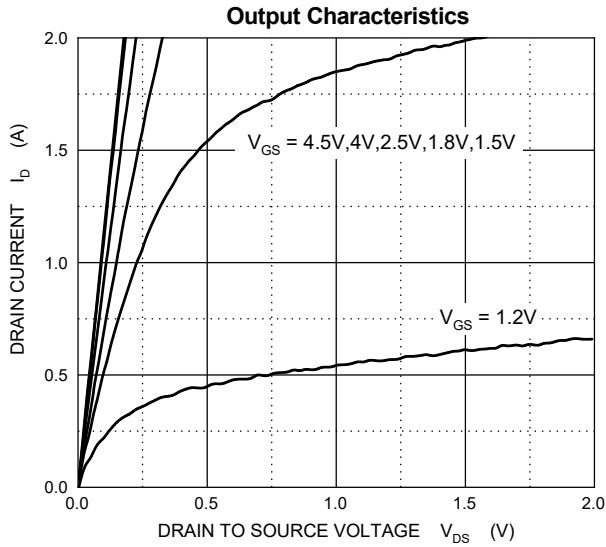


Typical Characteristics


Typical Capacitances

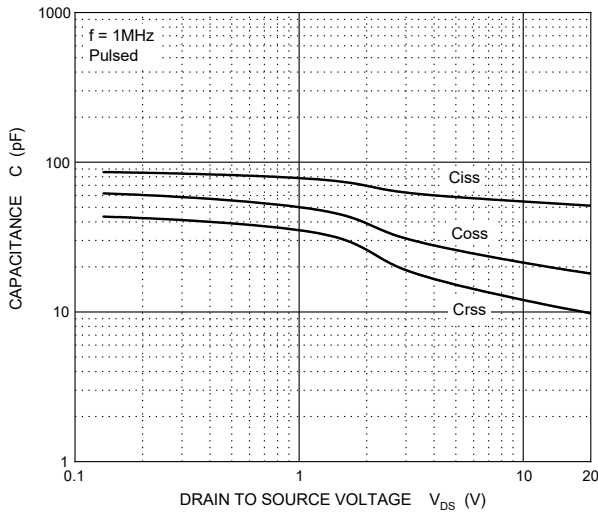


Gate Charge

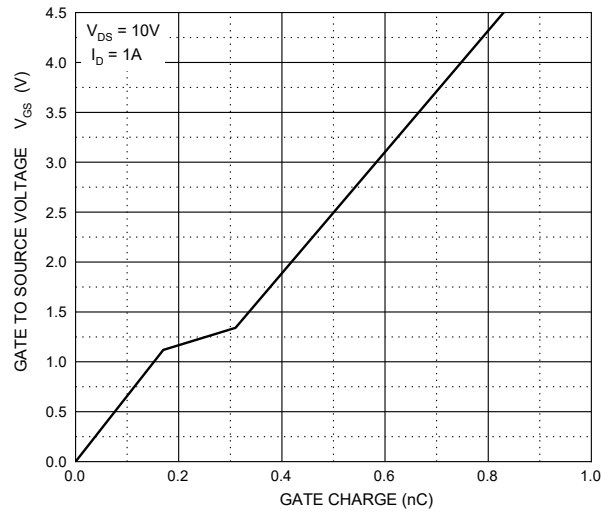


Source-Drain Diode Forward Characteristics

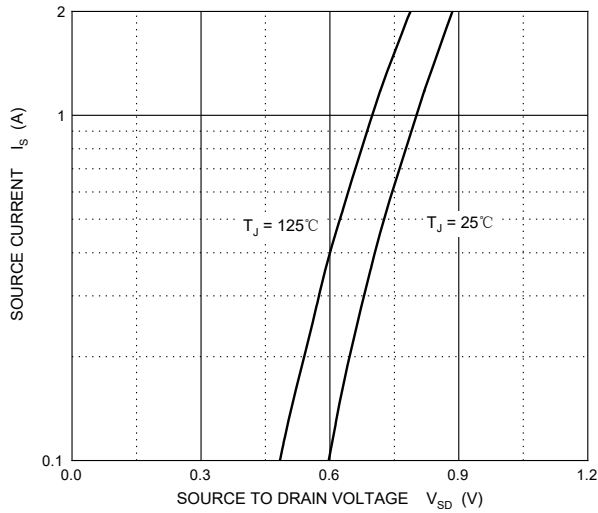


Drain-Source Breakdown Voltage

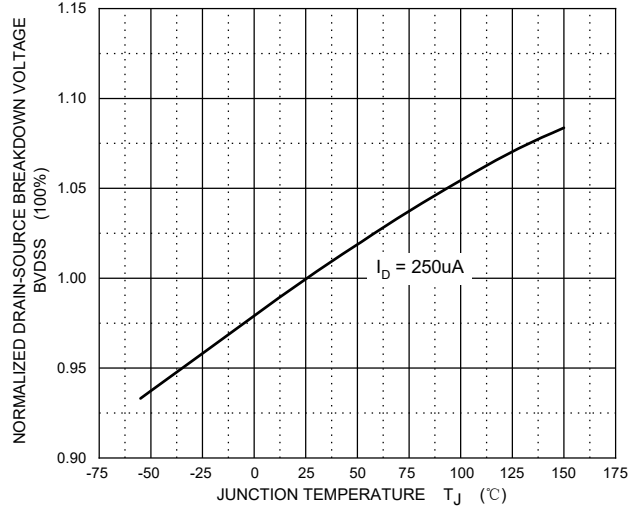




Maximum Safe Operating Area

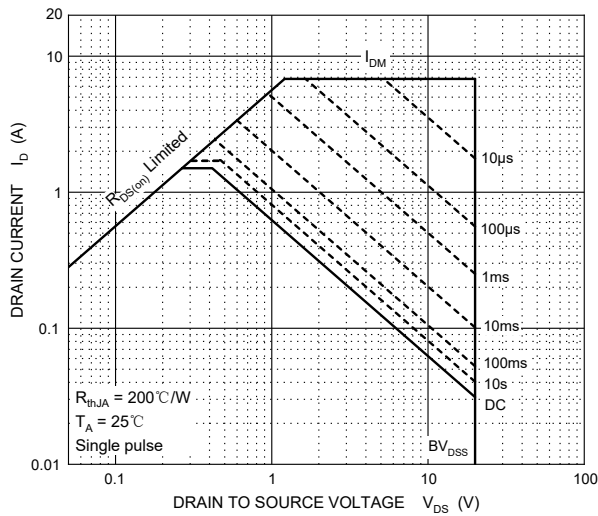

Typical Characteristics

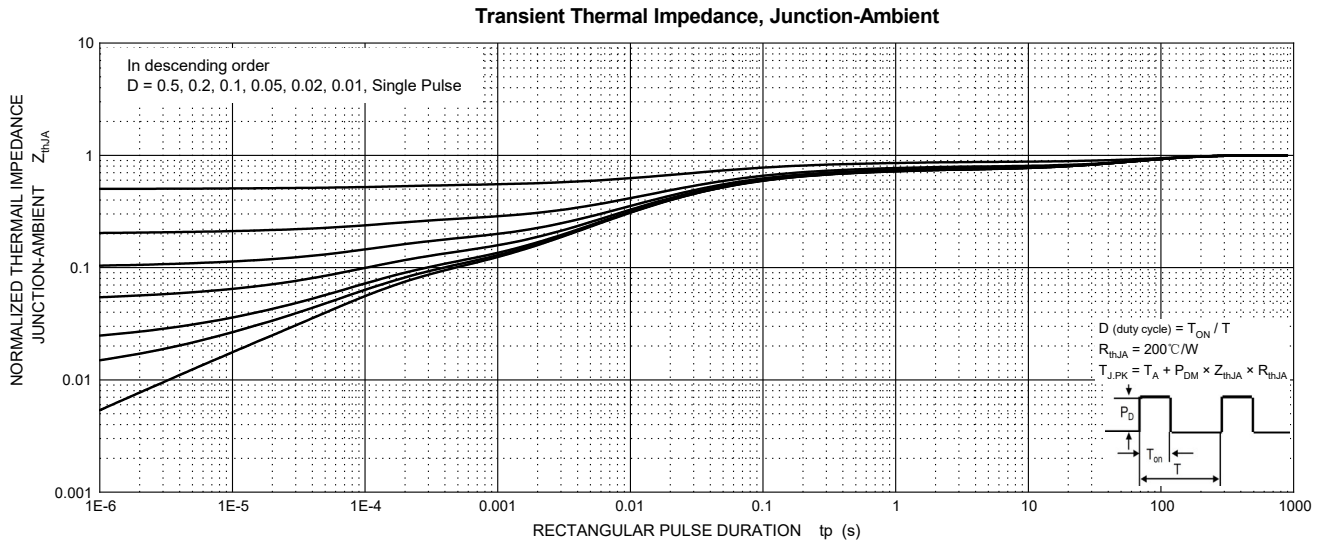


SOT-723 Package Outline Dimensions

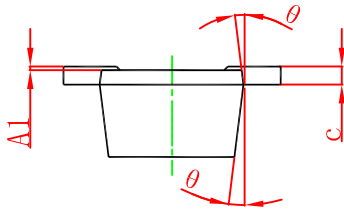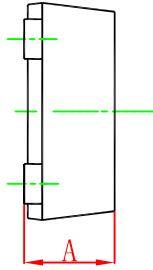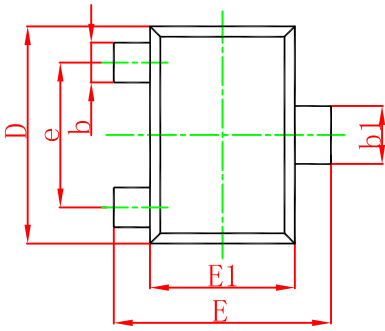

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	0.430	0.500	0.017	0.020
A1	0.000	0.050	0.000	0.002
b	0.170	0.270	0.007	0.011
b1	0.270	0.370	0.011	0.015
c	0.080	0.150	0.003	0.006
D	1.150	1.250	0.045	0.049
E	1.150	1.250	0.045	0.049
E1	0.750	0.850	0.030	0.033
e	0.800TYP.		0.031TYP.	
θ	7° REF.		7° REF.	

SOT-723 Suggested Pad Layout

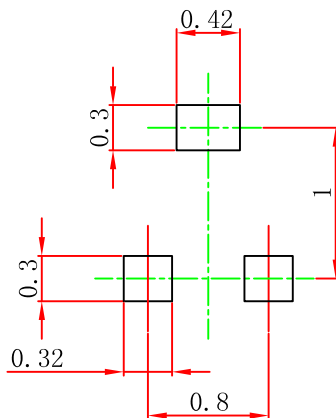

Note:


1. Controlling dimension: in millimeters.
2. General tolerance: ± 0.05 mm.
3. The pad layout is for reference purposes only.

NOTICE

JSCJ reserves the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. JSCJ does not assume any liability arising out of the application or use of any product described herein.

SOT-723 Tape and Reel

SOT-723 Embossed Carrier Tape

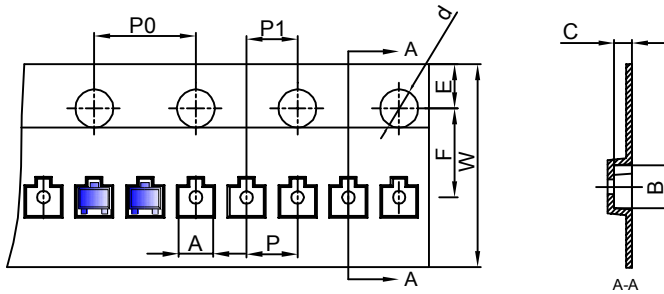


Packaging Description:


SOT-723 parts are shipped in tape. The carrier tape is made from a dissipative (carbon filled) polycarbonate resin. The cover tape is a multilayer film (Heat Activated Adhesive in nature) primarily composed of polyester film, adhesive layer, sealant, and anti-static sprayed agent. These reeled parts in standard option are shipped with 8,000 units per 7" or 17.8cm diameter reel. The reels are clear in color and is made of polystyrene plastic (anti-static coated).

Dimensions are in millimeter										
Pkg type	A	B	C	d	E	F	P0	P	P1	W
SOT-723	1.33	1.45	0.61	Ø1.50	1.75	3.50	4.00	2.00	2.00	8.00

SOT-723 Tape Leader and Trailer

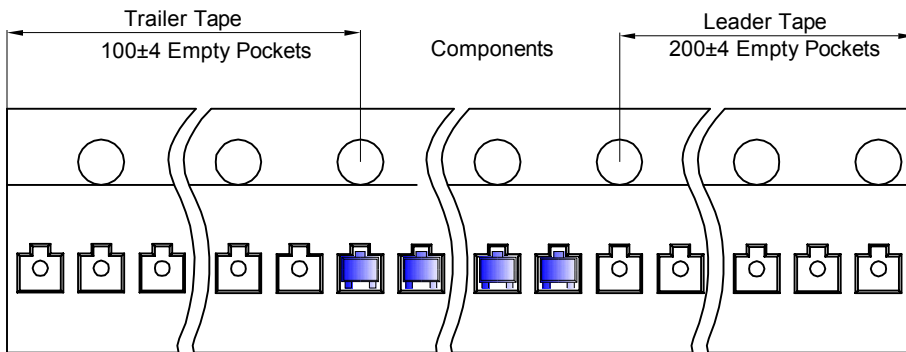

SOT-723 Reel

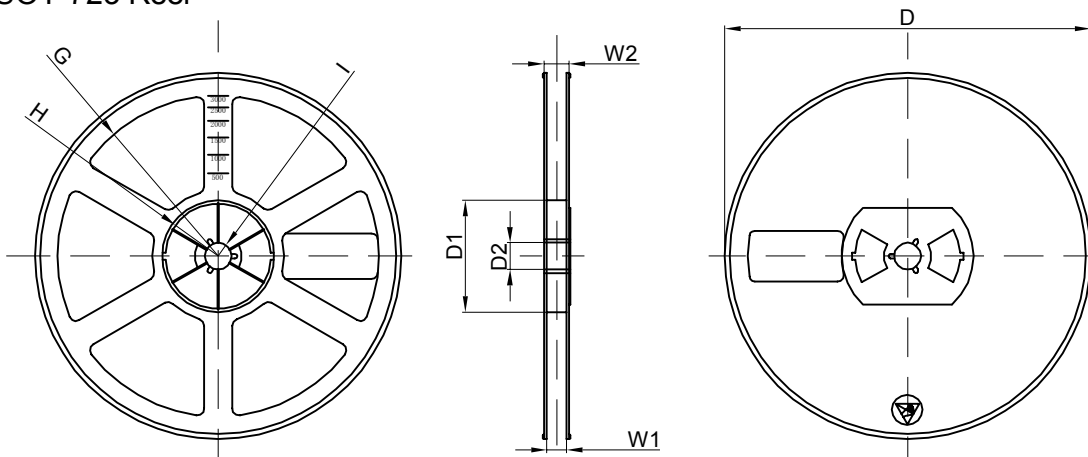

Dimensions are in millimeter								
Reel Option	D	D1	D2	G	H	I	W1	W2
7" Dia	Ø178.00	54.40	13.00	R78.00	R25.60	R6.50	9.50	12.30

REEL	Reel Size	Box	Box Size(mm)	Carton	Carton Size(mm)	G.W.(kg)
8000 pcs	7 inch	80,000 pcs	203×203×195	320,000 pcs	438×438×220	