

TO-220-3L/TO-220F Plastic-Encapsulate Diode

SBD2060TCTB、SBDF2060TCTB SCHOTTKY BARRIER RECTIFIER


MAIN CHARACTERISTICS

| | |
|--------------|-------------------------------------|
| I_o | 20 (2×10) A |
| V_{RRM} | 60V |
| T_j | 150 °C |
| $V_{F(typ)}$ | 0.46V (@T_j=125°C) |


FEATURES

- Low Power Loss, High Efficiency
- Guard Ring Die Construction for Transient Protection
- High Current Capability and Low Forward Voltage Drop

MARKING



SBD(F)2060TCTB = Device code
 Solid dot = Green molding compound device
 if none, the normal device
 XXXX = Code

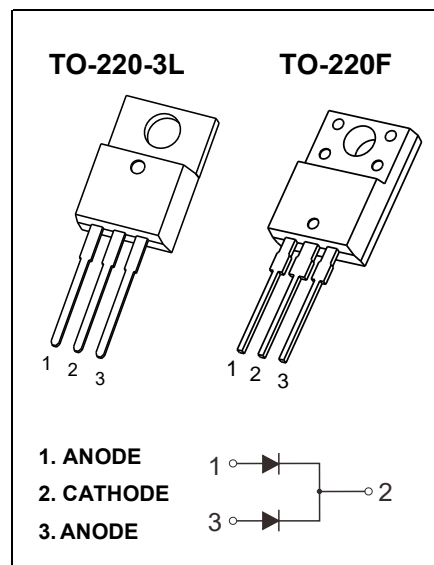

MAXIMUM RATINGS (T_a=25°C unless otherwise noted)

| Symbol | Parameter | SBD | | Unit |
|-----------------|--|----------|-----------|------|
| | | 2060TCTB | F2060TCTB | |
| V_{RRM} | Peak repetitive reverse voltage | 60 | | V |
| V_{RWM} | Working peak reverse voltage | | | |
| V_R | DC blocking voltage | | | |
| $V_{R(RMS)}$ | RMS reverse voltage | 42 | | V |
| I_o | Average rectified output current | ∅ | | A |
| I_{FSM} | Non-Repetitive peak forward surge current (8.3ms half sine wave) | 180 | | A |
| $R_{\theta Jc}$ | Thermal resistance from junction to case , T _c =25°C | 2.0 | 3.0 | °C/W |
| $R_{\theta JA}$ | Thermal resistance from junction to ambient | 62.5 | | °C/W |
| T_j | Junction temperature | 150 | | °C |
| T_{stg} | Storage temperature | -55~+150 | | °C |

ELECTRICAL CHARACTERISTICS (T_a=25°C unless otherwise specified)

| Parameter | Symbol | Test conditions | Min | Typ | Max | Unit |
|-----------------|------------|-----------------|-----------------------|------|------|------|
| Reverse voltage | $V_{(BR)}$ | $I_R=1mA$ | 60 | | | V |
| Reverse current | I_R | $V_R=60V$ | T _j =25°C | 30 | 200 | uA |
| | | | T _j =125°C | 20 | | mA |
| Forward voltage | V_F | $I_F=5A$ | T _j =25°C | 0.43 | | V |
| | | | T _j =125°C | 0.35 | | V |
| | | $I_F=10A$ | T _j =25°C | 0.50 | 0.55 | V |
| | | | T _j =125°C | 0.46 | | V |

*Pulse test: pulse width ≤300μs, duty cycles ≤ 2.0%.

Typical Characteristics

FIG.1: FORWARD CURRENT DERATING CURVE

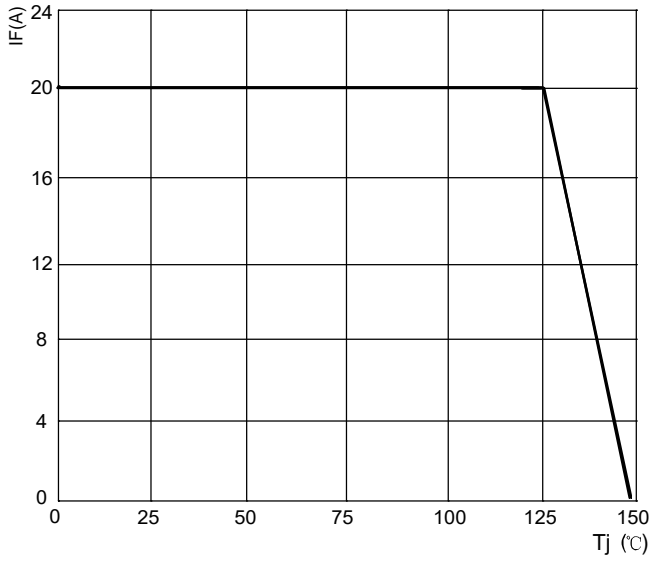


FIG.2: TYPICAL FORWARD CHARACTERISTICS

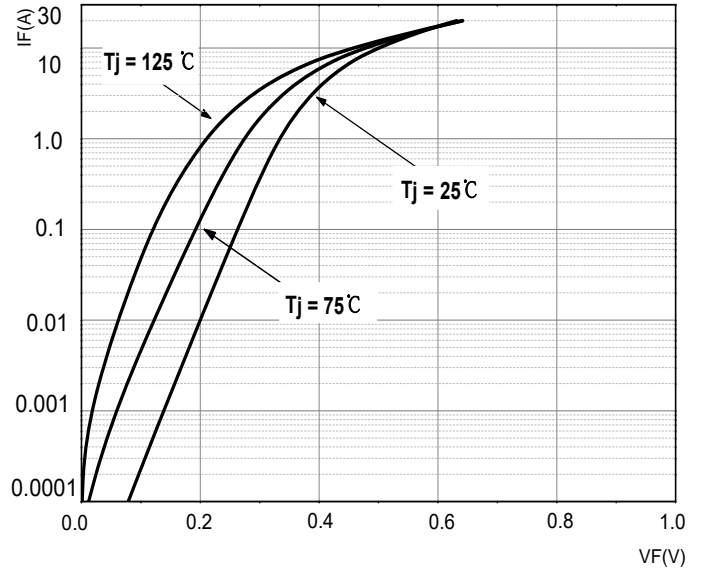


FIG.3: TOTAL CAPACITANCE DERATING CURVE


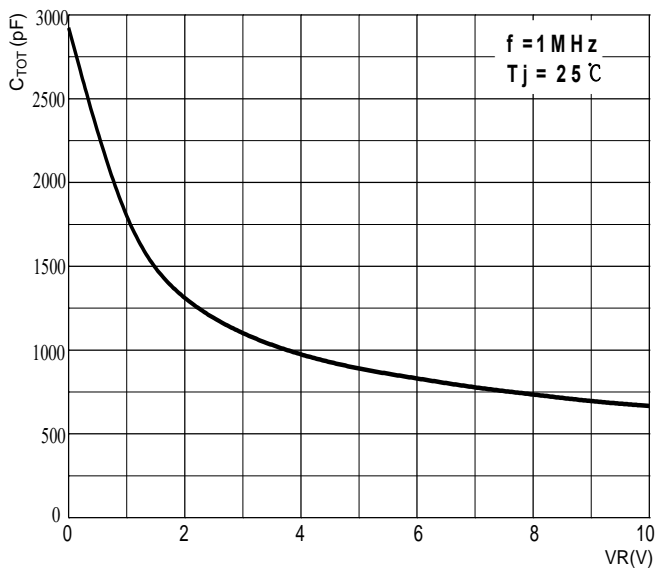


FIG.4: TYPICAL REVERSE CHARACTERISTICS




TO-220-3L Package Outline Dimensions

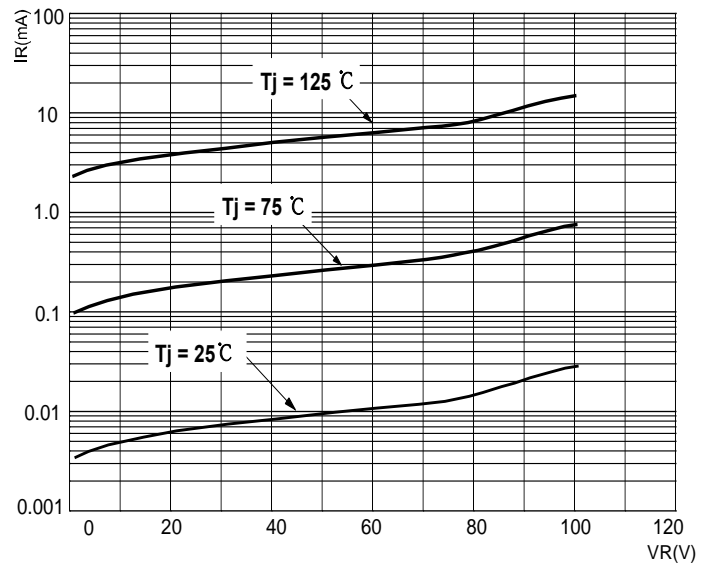

| Symbol | Dimensions In Millimeters | | Dimensions In Inches | |
|--------|---------------------------|--------|----------------------|-------|
| | Min | Max | Min | Max |
| A | 4.450 | 4.750 | 0.175 | 0.187 |
| A1 | 2.520 | 2.820 | 0.099 | 0.111 |
| b | 0.710 | 0.910 | 0.028 | 0.036 |
| b1 | 1.170 | 1.370 | 0.046 | 0.054 |
| c | 0.300 | 0.500 | 0.012 | 0.020 |
| c1 | 1.170 | 1.370 | 0.046 | 0.054 |
| D | 9.830 | 10.330 | 0.387 | 0.407 |
| E | 8.500 | 8.900 | 0.335 | 0.350 |
| E1 | 12.050 | 12.650 | 0.474 | 0.498 |
| e | 2.540 TYP | | 0.100 TYP | |
| e1 | 4.900 | 5.200 | 0.192 | 0.205 |
| F | 2.540 | 2.940 | 0.100 | 0.116 |
| h | 0.100 TYP | | 0.004 TYP | |
| L | 13.300 | 13.800 | 0.523 | 0.543 |
| L1 | 3.540 | 3.940 | 0.139 | 0.155 |
| Φ | 3.735 | 3.935 | 0.147 | 0.155 |

TO-220F Package Outline Dimensions

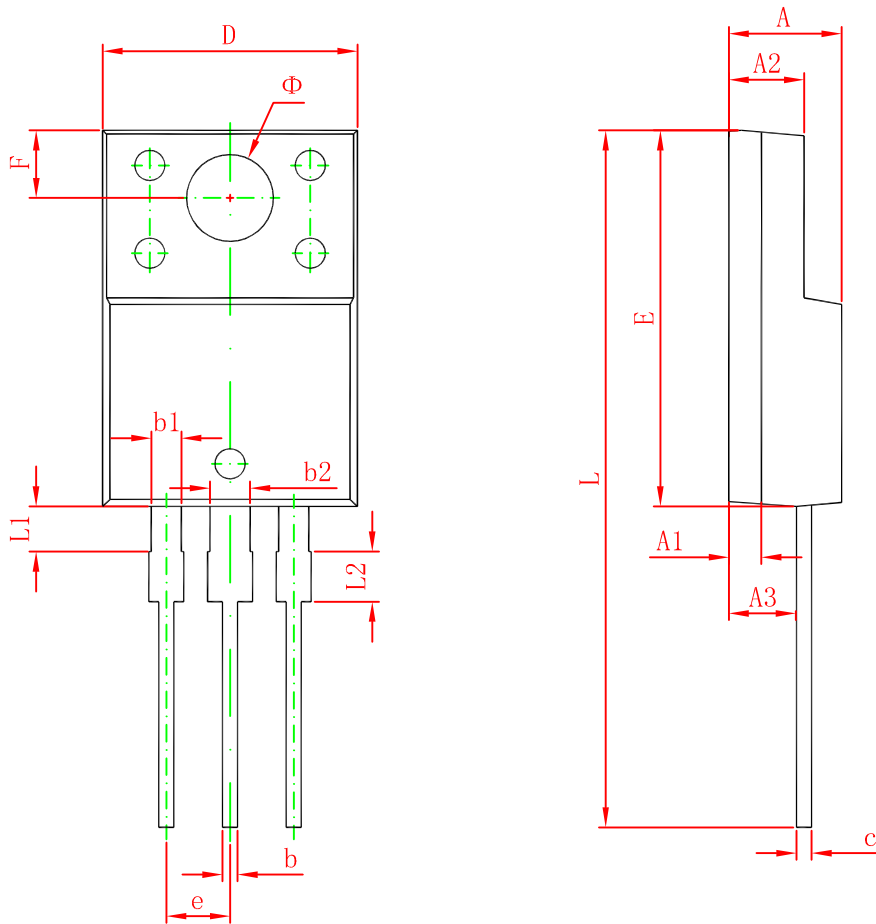

| Symbol | Dimensions In Millimeters | | Dimensions In Inches | |
|--------|---------------------------|--------|----------------------|-------|
| | Min. | Max. | Min. | Max. |
| A | 4.300 | 4.700 | 0.169 | 0.185 |
| A1 | 1.300 REF. | | 0.051 REF. | |
| A2 | 2.800 | 3.200 | 0.110 | 0.126 |
| A3 | 2.500 | 2.900 | 0.098 | 0.114 |
| b | 0.500 | 0.750 | 0.020 | 0.030 |
| b1 | 1.100 | 1.350 | 0.043 | 0.053 |
| b2 | 1.500 | 1.750 | 0.059 | 0.069 |
| c | 0.500 | 0.750 | 0.020 | 0.030 |
| D | 9.960 | 10.360 | 0.392 | 0.408 |
| E | 14.800 | 15.200 | 0.583 | 0.598 |
| e | 2.540 TYP. | | 0.100 TYP. | |
| F | 2.700 REF. | | 0.106 REF. | |
| Φ | 3.300 | 3.700 | 0.130 | 0.146 |
| L | 28.000 | 28.400 | 1.102 | 1.118 |
| L1 | 1.700 | 1.900 | 0.067 | 0.075 |
| L2 | 0.900 | 1.100 | 0.035 | 0.043 |